



2026

CIPTA PRINDO RATAMA
WE PROVIDE SOLUTIONS

Featured Products

PT. CIPTA PRINDO RATAMA

Phone :
+62 851 4122 2242
(022) 7539 366

Mail :
info@ciptaapindopratemala.co.id

Head Office :
Jl. Renggong Manis No.18,
Turangga, Kec. Lengkong,
Kota Bandung, Jawa Barat
40264

Workshop :
Pasir Koang No.116, Biru, Majalaya,
Kab. Bandung, Jawa Barat, 40392.



Featured Product 2026
PT. CIPTA APRINDO PRATAMA

Get in Touch.



Head Office & Workshop

Workshop

Pasir Koang No.116, Biru, Majalaya,
Kab. Bandung, Jawa Barat, 40392.

Official Office

Jl. Renggong Manis No.18, Turangga,
Kec. Lengkong, Kota Bandung, Jawa Barat 40264

Contact



Phone

(022) 7539 366
+62 851 4122 2242



Mail

info@ciptaaprindopratama.co.id

Website



Official Page

ciptaaprindopratama.co.id

Social



Instagram
ciptaaprindo



Linkedin
PT Cipta Aprindo Pratama



Youtube
Cipta Aprindo Pratama



Facebook
Cipta Aprindo Pratama



Tik Tok
ciptaaprindopratama

Featured Products



Videowall

Perfect way to show your identity in a bigger choice.



Videotron

Media that shows videos with light-emitting diodes (LEDs)



Digital Signage

Experience Technology, embrace the digital revolution.



Interactive Flat Panel

Your Perfect Essential Collaborative tool.



Conference System

Perfect Device to upgrade your meeting quality.



Audio System

Feel the Good sound for your Private room, Home Cinema, Meeting room, etc.



Security System

Protect your Home, Private room, Office, etc.



Parking System

Manage your Parking area with perfect Parking systems.



Computer

Programmable machine that executes & responds to a defined set of instructions.



Security Cyber

Protect your data, privacy and test your security systems.



Augmented Reality & VR

Augmented Reality (AR) is an interactive 3D technology that combines real-world displays with computer-generated digital elements.



Enclosure Kiosk

Make perfect your bussiness with good quality kiosk.



Software Engineer

Perfect your system bussiness with our service software engineer.



Internet of Things (IoT)

Everything that is connected and shares data over the internet.



Featured Product 2025
PT. CIPTA APRINDO PRATAMA

Core Products



Q - Entry



RevoSign

Core Products



Antrian Digital Q-Entry adalah sistem antrian dengan software berbasis web, yang mendukung untuk antrian online.

Q-Entry memiliki 3 tipe diantaranya :


Antrian Konvensional dimana sistem antrian dipasang pada server lokal khusus untuk antrian walk-in. Antrian Online adalah sistem antrian berbasis cloud untuk mendukung fitur antrian online. E-Form (Digital Branch) adalah nasabah dapat mengisi formulir digital beserta nomor antrian pada perangkat mobile yang tersedia di kantor layanan.

Fitur Unggulan

-  Web Based
-  Centralized System
-  Easy Handling Support
-  Minimal Maintenance Required

Ekosistem Q-Entry

- Q-Entry Kiosk
- Q-Entry Caller
- Q-Entry Digital Signage
- Q-Entry Display Counter
- Q-Entry Customer Satisfaction Survey
- Q-Entry E-Form
- Q-Entry Web Report
- Q-Entry Online Queueing

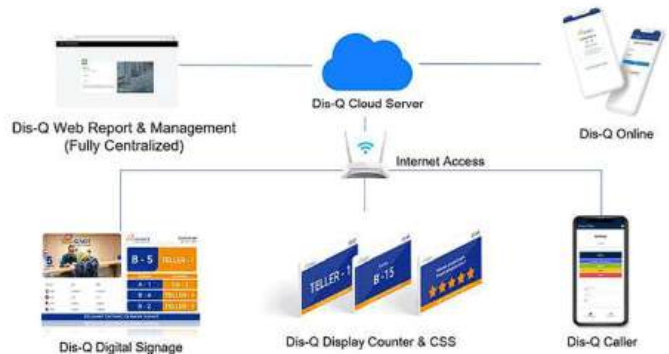

Fitur Utama

- Device Monitoring
- Device Grouping
- User Management
- Layout Management
- Media Library




RevoSign Digital Signage adalah sub-segmen dari Electronic Signage. Digital signage menampilkan informasi, iklan, dan pesan komunikasi. Tampilan digital menggunakan teknologi seperti LCD, LED, untuk menampilkan gambar digital, video, halaman web, data cuaca, menu restoran, atau teks. Dapat ditemukan di fasilitas umum, area sistem transportasi, museum, stadion, toko ritel, hotel, restoran, dan gedung perusahaan, dll. Menyampaikan pesan menggunakan digital signage dengan tujuan umum untuk menyampaikan pesan yang ditargetkan ke lokasi tertentu pada waktu tertentu.

RevoSign Client

- Run on Android Device
- Run on Windows OS

RevoSign CMS

- Hosted on Our Cloud Server



Digital Readiness Assessment

Mendukung Organisasi dalam mengukur tingkat kesiapan digital dan membangun pondasi transformasi yang terarah, realistis, dan berkelanjutan.

Methodology

Business Driven, Bukan Technology First

Pendekatan dimulai dari tujuan organisasi & prioritas bisnis, bukan tren teknologi.

Pragmatic & Actionable

Rekomendasi realistis untuk dijalankan bertahap, prioritas jelas, memiliki panduan implementasi yang terukur & dapat memberikan hasil yang nyata dalam jangka pendek maupun jangka panjang.

Vendor-Neutral & Independent

Penilaian objektif & bebas kepentingan vendor. Rekomendasi berbasis kebutuhan organisasi, dengan opsi teknologi yang transparan, aman & memiliki analisis manfaat-resiko yang jelas.

Strategic & Contextual

Solusi disesuaikan dengan arah strategis, regulasi, kondisi operasional, kesiapan SDM serta budaya organisasi (bukan template).

Context-Aware Digital Readiness

Asesmen dilakukan secara komprehensif untuk memahami posisi awal, tantangan, peluang, serta kesiapan organisasi dalam menjalankan transformasi digital berkelanjutan.

Governance, Sustainability & Value Creation

Transformasi digital diarahkan agar memperkuat tata kelola, meningkatkan kapabilitas internal, memastikan keberlanjutan program & menciptakan nilai nyata bagi organisasi.

Videowall Display

Make perfect choice Videowall for your Business!

Customization & Flexibility

Unlike traditional signage or video screens, video wall allow businesses to customise the perfect solution for their specific needs. They can be configured to specific sizes, shapes and resolutions to provide the best fit for each unique business environment.

Clear presentation even up close

Video walls have a constant pixel density regardless of the array size enlarging the array just increases the overall resolution of the video wall. This mean that video wall allow for brilliant imagery even when viewed at a close distance.

Simultaneous delivery of mixed content

Each display unit in a video wall can accept and process different signals, so businesses can display multiple types of content simultaneously on a single video wall. Single each content source can be displayed on any part of the video wall, it allows for greater flexibility and increased creativity in content option.

Cost-efficiency

Video wall display allow users to capture their audiences attention without breaking the bank. Video walls have greater screen area per unit cost than other types of displays, so they can help businesses increase their exposure without incurring investment costs.



Videowall Display Product Lineup

SAMSUNG

Video wall Display

Scan for More Information
and Order



optoaprintproptama.co.id



UHF-E UHN-E Series

Extreme Narrow Bezel 8-to-8.17mm

Premium Video Wall solution with Extreme Narrow Bezel

700 Nit Brightness
Available size : 46", 55"



UHF5 Series

Super Narrow Bezel 8-to-8.55mm

Designed for easy installation with Ultra-Compact design

700 Nit Brightness
Available size : 46"



Ultra-Narrow Bezel 8-to-8.35mm

Powerful and versatile video wall solution for various business needs

Samsung Ultra-Narrow Bezel video wall allow users to maximize convenience while minimizing expense. The displays are efficiently daisy-chained together, eliminating the need for costly external equipment. Backed by 24/7 durable performance, the displays ensure brilliant, low-maintenance content delivery anywhere and at anytime.

UDE-A Series		700 Nit		Screen size : 46", 55"
UDE-B Series		500 Nit		Screen size : 46", 55"
UDE-C Series		500 Nit		Screen size : 46"
UDE-P Series		700 Nit		Screen size : 46"



VMB-U

- Transform any space with high impact visuals
- View content from any angle
- Vibrant images in any light

Ultra-Narrow Bezel 8-to-8.35mm

500 Nit Brightness
Available size : 46", 55"



VMB-E

- Transform any space with high impact visuals
- View content from any angle
- Vibrant images in any light

Extreme Narrow Bezel 8-to-8.17mm

500 Nit Brightness
Available size : 55"



VMB-R

- Nearly invisible 0.44 mm bezel
- View content from any angle
- Image enhancement technology

Razor Narrow Bezel 8-to-8.044mm

700 Nit Brightness
Available size : 55"



BEYOND A VIDEO WALL

The World's Narrowest 0.44mm Even Bezel Video wall



A Step Closer to Zero Bezel, A Leap Closer to the Original



0.44mm Even Bezel
Almost as fine as the line drawn by a 0.4mm ballpoint pen.



0.88mm Bezel To Bezel
Almost as thin as a credit card (0.8mm)

Brighten Every Corner of the Screen



Low Uniformity
Bezel boundaries have a tendency to appear dark.



91% Uniformity | LG 55SVH7E
Delivers uniform vivid colors throughout the screen.

Captivating Image Quality to the Top of the Screen



Low Viewing Angle
Insufficiently bright to attract viewers.



60° High Viewing Angle | LG 55SVH7E
Excellent image quality even at the top of the screen.



FHD 0.44mm Even Bezel Video wall



- Bezel : 0.44 mm (Even)
- Depth : 86.5 mm



500 Nit
Screen Size
55"



700 Nit
Screen Size
55"

FHD Slim Bezel Video wall



- Bezel : 1.74mm (PB-to-PB), 1.3mm (TL), 0.44mm (B/R)
- Depth : 86.5 | 89.7 | 93.1 mm



500 Nit
Screen Size
49", 55"



700 Nit
Screen Size
55"

FHD Narrow Bezel Video wall



- Bezel : 2.25mm (T/L), 1.25 mm (B/R)
- Depth : 93.1 mm



700 Nit
Screen Size
55"



Enhanced resolution

Boost image quality with Pure Colour Pro. Delivering higher luminance through custom colour temperature settings and advanced gamma calibration, content looks crisper and more radiant for stunning realism in every presentation.



Versatile viewing

Reach new heights or go wide with a custom Videowall display in either portrait or landscape mode. Connect as many displays as you like to form a captivating design that fits perfectly in your space.



Present sensor

Optimise your workspace with an intelligent display setup. The meeting room presence sensor keeps operational costs down by switching your Philips displays off when nobody is present, and automatically switches them back on once motion has been detected.



Discover the Philips Video wall Series

Get the Bigger Picture | Reduction through PoE Energy | Reduction in water use

55BDL3005X/00

- Screen size : 55 inch
- Direct LED Backlight
- FULL HD
- Brightness : 500 cd/m2

55BDL3005X/00

- Screen size : 55 inch
- Direct LED Backlight
- FULL HD
- Brightness : 700 cd/m2

55BDL3005X/00

- Screen size : 49 inch
- Direct LED Backlight
- FULL HD
- Brightness : 450 cd/m2



Seamless large screens with ultra-narrow bezel

Extreme narrow 3.5mm/7.7mm/0.88mm bezel-to-bezel width creates a seamless picture, opening endless possibilities for designing a captivating visual experience.




Brilliant content from any angle

BOE ADS panel technology enables better control of liquid crystals, which in turn allows the screen to be viewed from virtually any angle. Wide viewing angles mean content is easily visible even if viewers aren't standing directly in front of the display. Audiences can get clear details and vivid colors regardless of where the screen is located.



Support eye protection mode

The backlight source of a LCD screen contains blue light, it has short wavelength and high energy. Watching for a long time will make people's eyes tired. UNV LCD video wall supports eye protection mode, which adjusts the color temperature through a specific algorithm to reduce the blue light emitted by the screen to achieve the effect of eye protection.



UNB 3.5mm Bezel Video wall (ECO)

- Screen size : 46", 55"
- 3.5mm Bezel
- Brightness : 500 cd/m2
- Resolution : 1080P



UNB 3.5mm Bezel Video wall (Standard)

- Screen size : 46", 49", 55"
- 3.5mm Bezel
- Brightness : 500 cd/m2
- Resolution : 1920 x 1080

INB 1.7mm Bezel Video wall

- Screen size : 46", 55"
- 1.7mm Bezel
- Brightness : 500 cd/m2
- Resolution : 1920 x 1080



RNB 0.88mm Bezel Video wall

- Screen size : 46", 55"
- 0.88mm Bezel
- Brightness : 500 cd/m2
- Resolution : 1080P



Hybrid Display Video Wall

Orion's unique off-board electronic design makes it possible that any system failure can be easily accessible, reducing time and heat. Redundant power supply means providing you continuous operation in the event of power failure.

ORION
Display

Product Features

- 1. Orion off board solution**
 - SMPS and IP boards are off from wall screen
 - Easy for maintenance, quick response
- 2. Redundant power supply**
 - High reliability for 24/7 operation
 - Ideal for control room application
- 3. Cat5/e communication**
 - More than 100 meters distance controllable
 - High advantage for technical access to system

Information



Corporate control room
SIZE: 55" UNB(3.5mm)




Rear view
SIZE: 55" UNB(3.5mm)



LCD Module (2x2)



IMAGE PROCESSING
MODULE



POWER SUPPLY
MODULE

OLMR, OLME, OLMU_Bezel to Bezel

Orion video wall creates natural appearing full screen over multiple configuration of LCD panels with its extremely narrow bezel gap. This creates a powerful video wall minimizing the visual distraction and more continuous image spreads across multiple displays.

Product Features

- 1. Authentic commercial panel**
 - 100% IPS industrial grade screen
 - 24/7 guarantee
- 2. Auto white balance**
 - 20 seconds enough for 1 panel's calibration
 - Panel's white uniformity ensures more than 99%
- 3. Auto Sync in MLC**
 - Fully processed by Orion board's solution
 - reducing visual distortion in fast moving video
- 4. Lighter is better *(option)**
 - 17kg MLC weight upgrade chassis are ready
 - Easy for installation and maintenance

Information



Corporate control room
SIZE | 55" RNB(0.88mm) 18 X 3



Government control room
SIZE | 55" RNB(0.88mm) 15 X 2

PROVENT

Videowall Display Lineup



Professional and Exquisite
Display Solution
with Ultra Slim Bezel

PRV-4930IS/5530IS

Spesifikasi PRV-4930IS/5530IS

Screen size	49" - 55"
Resolution	1920x1080 @60Hz
Brightness	500 cd/m ²
Aspect Ratio	16 : 9
Bezel to Bezel	3.5 mm



TKDN
TINGKAT KOMPONEN DALAM NEGERI

Scan for More Information and Order



02100000000000000000

BenQ

Videowall Display Lineup

Display Bezel Super Kecil dengan Desain Bezel 3,5mm Ukuran 55" | PL552

Menarik Minat Pelanggan dengan Cara Baru



Panel	
Screen size	55 inch
Panel type	IPS
Active area	6078.9 x 683.0 mm
Resolution	FHD 1920 x 1080 pixels
Orientation	Landscape and Portrait
Aspect ratio	16:9
Contrast ratio (typical)	1400:1
Dynamic contrast ratio	500,000:1
Response time	12 ms
Color gamut	72% NTSC
Color depth	8 bit
Backlight life (typical)	50,000 hrs

Display Bezel Super Kecil dengan Desain Bezel 3,5mm ukuran 49" | PL490



Panel	
Screen size	49"
Panel type	IPS
Resolution	FHD 1920 x 1080 pixels
Orientation	Landscape and Portrait
Aspect ratio	16:9
Contrast ratio (typical)	1300:1
Dynamic contrast ratio	500,000:1
Response time	8 ms
Color gamut	72% NTSC
Color depth	8 bit

Display Bezel Super Kecil dengan Desain Bezel 3,5mm Ukuran 55" | PH5501

Penyesuaian Temperatur Warna yang Fleksibel untuk Gambar Menawan



Panel	
Screen size	55"
Panel type	IPS
Active area	1209.6 (H) x 683.4 (V)
Resolution	FHD 1920 x 1080
Orientation	Portrait / Landscape
Aspect ratio	16:9
Panel brightness (typical)	180
Contrast ratio (typical)	1400:1
Dynamic contrast ratio	500,000:1
Response time	8
Color gamut	72%
Color depth	10 bit



DHL550UDM-ES

1.7mm Series

Available Size : 55 inch, 46 inch
 Brightness : 500 - 700 nits
 Resolution : 1920 x 1080 (FHD)
 Ultra-Narrow Bezel
 Built-in 3D COMB filter and
 3D noise reduction

- Industrial level PVA LCD panel, suitable for extensive 24/7 continuous works
- Ultra-narrow 1.7mm bezel-to-bezel design
- High contrast ratio and high brightness greatly enhance the video layering, and present the details of the video
- High fidelity digital processing for a brilliant and vivid video
- Wide array of connectivity options HDMI, DVI, VGA, BNC, RS232, USB
- Infrared, RS232 dual mode, supporting remote PC control



DHL550UDH-ES



DHL460UDM-ES



DHL460UDH-ES



DHL550UDM-EG

1.8mm Series

Available Size : 55 inch
 Brightness : 500 nits
 Resolution : 1920 x 1080 (FHD)
 Pixel Density : 40dpi
 LCD Technology : IPS



DHL550UDH-EG

1.8mm Series

Available Size : 55 inch
 Brightness : 700 nits
 Resolution : 1920 x 1080 (FHD)
 Pixel Density : 40dpi
 LCD Technology : IPS



LS550UCM-EF - 55 Inch

3.5mm Series TKDN

Available Size : 55 inch, 49 inch, 46 inch
 Resolution : 1920 x 1080 (FHD)
 Industrial Design, 24/7 Operation
 Anti-glare panel, Clear & vivid Images
 Ultra Narrow bezel



LS490UCM-EF - 49 Inch



LS460UCM-EF - 46 Inch



DHL460UTS-E

5.5mm Series

Available Size : 46 inch
 Brightness : 500 nits
 Resolution : 1920 x 1080 (FHD)
 Pixel Density : 48dpi
 LCD Technology : PVA



DHL460UTS-E

11.8mm Series

Available Size : 49 inch
 Brightness : 380 nits
 Resolution : 1920 x 1080 (FHD)
 Pixel Density : 46dpi
 Bezel Width : 5.9mm(U/L/R/B)



DHL460UTS-E

0.88mm Series

Available Size : 55 inch
 Brightness : 500 nits
 Resolution : 1920 x 1080 (FHD)
 Pixel Density : 40dpi
 Bezel Width : 0.44mm(U/L/R/B)



DHL460UTS-E

3.5mm Series

Available Size : 65 inch
 Brightness : 700 nits
 Resolution : 3840 x 2160 (FHD)
 Pixel Density : 68dpi
 Bezel Width : 2.3mm(U/L/R/B)



Videotron

Indoor & Outdoor

PROVENT

Videotron Display Lineup



JF Series

Videotron Indoor

Pixel pitch(mm) : P1.8/P2.5/P3.0/P4

Cabinet Size : 640 x 480

Brightness : 500 Nits

Refresh rate : 1920Hz - 3840Hz



LTi Series

Videotron Indoor

Pixel pitch(mm) : P1.5/P1.8/P2.5/P4

Cabinet Size : 640 x 480

Brightness : 600 Nits

Refresh rate : 3840Hz



JS Series

Videotron Outdoor

Pixel pitch(mm) : P4/P5/P8/P10

Cabinet Size : 960 x 960

Brightness : 5500 Nits

Refresh rate : 1920Hz



Videotron Display Lineup



Videotron Outdoor

Available Module

P2.5 | P4 | P6 | P10



Videotron Indoor

Available Cabinet

P1.8 | P2.5 | P4

DATALITE

Videotron Display Lineup



Videotron Indoor



Datalite LED Videotron Indoor P1.56

Pixel Pitch : 1,56 mm
Module size : 150 x 337,5
Cabinet size : 600 x 337,5

Datalite LED Videotron Indoor P1.875

Pixel Pitch : 1,875 mm
Module size : 150 x 337,5
Cabinet size : 600 x 337,5

Datalite LED Videotron Indoor P2.5

Pixel Pitch : 2,5 mm
Module size : 250 x 250
Cabinet size : 500 x 1000

Videotron Outdoor



Datalite LED Videotron Outdoor P3.9

Pixel Pitch : 3,9 mm
Module size : 500 x 250
Cabinet size : 500 x 1000

Datalite LED Videotron Outdoor P6.67

Pixel Pitch : 6,67 mm
Module size : 320 x 320
Cabinet size : 960 x 960

Datalite LED Videotron Outdoor P8

Pixel Pitch : 8 mm
Module size : 320 x 320
Cabinet size : 960 x 960



Videotron Display Lineup

High refresh, High Gray scale, High load
Uniform ink color, Dedicate Colors
Broadcast professional display
Restore HD picture quality




Scan for More Information
and Order
cailiang@videotron.com

Videotron Outdoor



D Series

D3 | Pixel Pitch : 3.076mm
D2.5 | Pixel Pitch : 2.5mm
P3.076 High Brightness
D5 Exterior 320x160mm



P Series

P3 | 192x192mm RGB Full Color
P6 | Pixel Pitch : 6mm
P8 | Pixel Pitch : 8mm



A Series

A5 | Pixel Pitch : 5mm
A6 | Pixel Pitch : 6.67mm
A8 | Pixel Pitch : 8mm

Videotron Indoor



D Indoor Series

D4 | Pixel Pitch : 4mm | 500-550 Nit
D3 | Pixel Pitch : 3.076mm | 500-550 Nit
D2.5 | Pixel Pitch : 2.5mm | 500-550 Nit
D1.53 | Pixel Pitch : 1.538 | 350-400 Nit



P Indoor Series

P1.875 | Pixel Pitch : 1.875mm | 550 Nit
P3 | Pixel Pitch : 3mm | 600 Nit
P5 | Pixel Pitch : 5mm | 550 Nit



Videotron Display Lineup

Videotron Indoor



P1.538	P1.875	P2.5	P4	P5
320*160mm	240*240 mm	320*160mm	256*128 / 320*160mm	320*160mm
208*104 ~ 21832	128*128 ~ 110364	128*128 ~ 110364	64*32 ~ 2048 / 80*40 ~ 3200	64*32 ~ 2048
640*480*53mm	480*480*75mm	640*480*75mm / Magnetic	Customize / Magnetic	640*480*75mm / Magnetic
422500 dots/m2	284454 dots/m2	160,000 dots/m2	82,900 dots/m2	400,000 dots/m2
SMO 1610	SMO 1515	SMO 2121	SMO 2121	SMO 2121
Die-Casting Alum / Iron	Die-Casting Alum / Magnetic	Iron / Die-Casting Alum / Magnetic	Iron / Die-Casting Alum / Magnetic	Iron / Die-Casting Alum / Magnetic
7.5 Kg	7.5 KG	7.35 KG	13 KG	13 KG
1/12	1/12	1/12	1/18	1/18
≥ 6000 CD/m2	≥ 6000 CD/m2	≥ 12000 CD/m2	≥ 12000 CD/m2	≥ 14000 CD/m2
H=120°, V=120°	H=120°, V=120°	H=120°, V=120°	H=120°, V=120°	H=120°, V=120°
≥ 3840 Hz	≥ 192003840 Hz	≥ 1920 / 3840 Hz	≥ 1920 / 3840 Hz	≥ 1920 / 3840 Hz
200 ~ 240 V	200 ~ 240V	110 ~ 220V	200 ~ 240 V	200 ~ 240 V
116 W/m2	135 W/m2	300 W / m2	300 W/m2	300 W/m2
360 W/m2	480 W / m2	600 W / m2	600 W/m2	600 W/m2
100,000 Hours	100,000 Hours	100,000 Hours	100,000 Hours	100,000 Hours
5.3/10.000	5.3/10.000	5.3/10.000	5.3/10.000	5.3/10.000
-10°C ~ +40°C	-10°C ~ +50°C	-10°C ~ +50°C	-10°C ~ +50°C	-10°C ~ +50°C
10% ~ 90% RH	10% ~ 95% RH	10% ~ 95% RH	10% ~ 95% RH	10% ~ 95% RH

Videotron Outdoor



P4	P5	P6	P8
320mm*160mm	300mm*160mm	150mm*150mm	256*128 / 320*160mm
50*40 ~ 3200	64*32 ~ 2048	32*32 ~ 1024	40*28 ~ 600
960mm*960mm	960mm*960mm	960mm*960mm	960mm*960mm
63500 dots/m2	40,000 dots/m2	27,777 dots/m2	15,625 dots/m2
SMO 1610	SMO 2727	SMO 2727	SMO 2727
Die-Casting Alum / Iron	Die-Casting Alum / Iron	Die-Casting Alum / Iron	Die-Casting Alum / Iron
35 / 40 KG	35 / 40 KG	35 / 40 KG	35 / 40 KG
1/10	1/6	1/6	1/5
5500 ~ 6000 CD/m2	5500 ~ 6000 CD/m2	5500 ~ 6000 CD/m2	5500 ~ 6000 CD/m2
H=120°, V=120°	H=120°, V=120°	H=120°, V=120°	H=120°, V=120°
≥ 1920 / 3840 Hz	≥ 1920 / 3840 Hz	≥ 1920 / 3840 Hz	≥ 1920 / 3840 Hz
200 ~ 240V	200 ~ 240V	200 ~ 240V	200 ~ 240V
450 W / m2	450 W / m2	450 W / m2	450 W / m2
900 W / m2	900 W / m2	900 W / m2	900 W / m2
100,000 Hours	100,000 Hours	100,000 Hours	100,000 Hours
≤ 0.0001	≤ 0.0001	≤ 0.0001	≤ 0.0001
-10°C ~ +50°C	-10°C ~ +50°C	-10°C ~ +50°C	-10°C ~ +50°C
10% ~ 90% RH	10% ~ 90% RH	10% ~ 90% RH	10% ~ 95% RH
IP 65	IP 65	IP 65	IP 65

MAXHUB Videotron Display

Choose and Customize regardless of your audience size.

Scan for More Information and Order



optoelectronic@maxhub.com

Exquisite Design Saves Time and Efforts

Hard connection of light boards lead to stability and reliability

Wireless hard connection that bids farewell to wired connection of the light lamp board. Quick replacement of the light board. Reduce failure rate and shorten installation time.



Fast Installation and Easy Maintenance

An light board can be quickly installed in 20s.
An integrated power box can be replaced in 40s*.

* Refer to time required by professionals



Videotron Outdoor

YM53 Series

Multiple tests to guarantee quality.
Cycle at high and low temperature ranging from -40°C to 85°C.
Shock test cycle without power on off.
High and low temperature ranging from -40°C to 85°C.
Low temperature high humidity.
High temperature high humidity.
Humidity in corrosion tests at 85°C and 85% humidity.
Salt spray corrosion tests at 35°C and 5% humidity.



YM53 Specification

Model	YM53M	YM53S	YM53L
LED Type	SM2835	SM2835	SM2835
Pixel Pitch (mm)	6	6.67	10
Cabinet Resolution (dots)	1920 x 1080	1920 x 1080	1920 x 1080
Cabinet Size (W x H x D) /mm	1920 x 1080 x 150		



Videotron Indoor

CM27 Series

High-end COB LED Display with superior performance suitable for multiple scenarios.

CM27 Specification

Model	CM27M	CM27L
LED Type	COB	COB
Pixel Pitch (mm)	2.5	1.87
Cabinet Size (W x H x D) /mm	400 x 270 x 150	400 x 270 x 150
Cabinet Resolution	1600 x 1080	1600 x 1080



High Protection Worry-free Operation

CCB technology combined with integrated encapsulation, assures smooth surface of the display with solid protection, high reliability and durability.

- High Protection Level
- Full Flip Chip
- Longer Lifespan



High Energy Efficiency & Low Power Consumption

Common cathode technology combines with dynamic energy-saving drive IC, lowering internal energy consumption of LED chips thus to achieve high efficiency and energy saving.

- Common Cathode Technology
- High-quality Drive IC



Lightweight and Slim Design Quick Installation

4.4kg weight and 38mm depth of cabinet enable quick installation. 16:9 cabinet ratio makes pixel-to-pixel 4K/8K/16K resolutions.

- 38mm Slim Screen
- 4.4KG Ultra-light Design
- 2K/4K/8K Display



Area Light Display & Vivid Color and High Contrast

Area light emission prevents eyes strain under long exposure to the display. High contrast of 20000:1 brings excellent performance of shadow details and vivid color to the image.

- Viewing Angle >170°
- 20000:1 High Contrast



CM27-L Specification

Model	CM27M-L	CM27L-L
LED Type	COB	COB
Pixel Pitch (mm)	2.5	1.87
Recommended Viewing Distance	3.2m	4.2m
Cabinet Resolution (dots)	1600 x 1080	1600 x 1080
Cabinet Size (W x H x D) /mm	400 x 270 x 150	400 x 270 x 150
Cabinet Weight (kg)	4.4	4.4

Videotron Indoor

CM27-L Series

Experience the future of display with our max LED technology. Enjoy crystal-clear visuals with uniform illumination and high contrast. Our COB encapsulation ensures a smooth, scratch-resistant surface.



Videotron Indoor

GV27 Series

Enhanced data visualization like never before with a readily built for invaluable clarity. The GV27 Series brings data and content to life in any monitoring center, command room, meeting space, or enterprise environment.

GV27 Specification

Model	GV27M	GV27S	GV27L	GV27S
Pixel Pitch (mm)	12	15	18	25
Pixel Composition	SM2835	SM2835	SM2835	SM2835
Panel Resolution (WxH)	1920x1080	1920x1080	1920x1080	1920x1080
Panel Dimension (WxHxD) /mm	1920x1080x150	1920x1080x150	1920x1080x150	1920x1080x150
Panel Material	Die-Cast Magnesium Aluminum Alloy	Die-Cast Magnesium Aluminum Alloy	Die-Cast Magnesium Aluminum Alloy	Die-Cast Magnesium Aluminum Alloy
Panel Weight (kg)	4.8	4.8	4.8	4.8
Maintenance method	Front	Front	Front	Front

Sleek, stylish, and streamlined

A standardized cabinet ratio design makes the GV27 Series perfect for a host of content-sharing use cases. The ultra-slim and lightweight structure takes up minimal space, without compromising on visual impact.



- 16:9 cabinet ratio for impeccable pixel density
- Space-saving wall-mounted installation
- 38mm ultra-slim cabinet
- 4.8kg lightweight design



- 2K/4K/8K counts with internal processing time cost

Create a personalized display experience without wasting time, or space. The compact GV27 delivers incredible results in a slim package.



EF27 Specification

Model	EF27M	EF27S	EF27L
Pixel Pitch (mm)	12	15	18
Pixel Composition	SM2835	SM2835	SM2835
Panel Resolution (WxH)	1920x1080	1920x1080	1920x1080
Panel Dimension (WxHxD) /mm	1920x1080x150	1920x1080x150	1920x1080x150
Panel Material	Die-Cast Magnesium Aluminum Alloy	Die-Cast Magnesium Aluminum Alloy	Die-Cast Magnesium Aluminum Alloy
Panel Weight (kg)	4.8	4.8	4.8
Maintenance method	Front	Front	Front

Videotron Indoor

EF27 Series

Introducing our enhanced LED display - amplified resolution, ultra-thin design, with a sleek lightweight structure and ultra-wide viewing angle, experience vivid image quality and minimal size.



Videotron Indoor

GH31 Series

Crafted for commercial excellence, the GH31 series display are suitable for a multitude of environments with a sleek, seamless design.

GH31 Specification

Model	GH3112	GH3115	GH3118
Pixel Pitch	1.2mm	1.5mm	1.8mm
Pixel Composition	SM2835	SM2835	SM2835
Panel Resolution (WxH)	512x384 pixels	640x480 pixels	768x576 pixels
Panel Dimension (WxHxD) /mm	640x480x31mm	768x576x31mm	896x672x31mm
Panel Material	Aluminum Alloy	Aluminum Alloy	Aluminum Alloy
Panel Weight	6.2kg(13.7lbs)	6.2kg(13.7lbs)	6.2kg(13.7lbs)
Maintenance Access	Front	Front	Front



MAXHUB OS

Explore a new era of simplicity, with a display built for exceptional ease of use. The GH31 series is compatible with MAXHUB OS for quick and easy setup. The display features a built-in Android system, with support for data transmission and wireless LAN screen sharing.



4K controller

Additional features include proprietary 2K, 4K controller. Self-adaptive resolution, supports PIP/PS/ four-screen split under 4K controller.

PYX Screen

Videotron Display Lineup



PYX Videotron Outdoor

- Pixel Pitch : 4mm
- Module Size: 320*160 mm
- Resolution: 80*40dots
- Brightness: ≥5000nits
- Pixel Density: 22500dots/m²
- Refresh Rate: ≥1920Hz Hz
- Cabinet size : 96x96 cm.



PYX Videotron Indoor

- Pixel Pitch : 2.5 mm
- Module Size: 320 x 160 mm
- Brightness: ≥ 6500nits
- Pixel Density: 22500dots/m²
- Refresh Rate: 4200Hz
- Lifetime >50,000 Jam

Scan for More Information
and Order



alphaapindopratiama.co.id



Digital Signage

Product Lineup



Digital AD Floorstand

- Available size : 55", 43"
- Display area : 680 x 1209 mm
- Resolution : 1080 x 1920
- Contrast ratio : 3000:1
- Build-in Memory : 8GB

-  **Advertisement Media**
Digital display has better attention-magnet
-  **Image & Video Collage**
Allowing you to display image & video at the same time, make it more dynamic on display
-  **Touchscreen**
Having direct and natural interaction with electronic devices is amazing
-  **Customized**
Supported by CMS Application, content can be adjusted
-  **Software on Clip**
Installed with android software
-  **Realtime Page**
Taking people around to get involved
-  **Efficiency**



Interaktif Kiosk

- Available size : 32"
- Touch type : Capacitive
- Receipt Printer : Built-in
- Build-in memory : 4GB

-  **Touchscreen**
Having direct and natural interaction with electronic devices is amazing
-  **Receipt Printer**
Actually can give you the transaction receipt by itself
-  **User Friendly**
Designed to be a very convenient device to use
-  **Media Center**
As a center of information management & promotion
-  **Image & Video Collage**
Allowing you to display image & video at the same time, make it more dynamic on display
-  **Within 5 Years, Earnings**



Interaktif Table

- Available size : 3840 x 2160
- Touch type : Capacitive
- Number of touch input : 40
- Touch Latency : 4ms

-  **Touchscreen**
Having direct and natural interaction with electronic devices is amazing
-  **Adjustable View**
Display content can be adjusted according to the user's position
-  **Multuser**
Can be used by more than one person simultaneously
-  **User Friendly**
Designed to be a very convenient device to use
-  **Media Center**
As a center of information management & promotion

Digital Signage for your Perfect Business

Make your business grow with the best display technology.

SAMSUNG
Product Lineup



Samsung Interactive Display Signage PMF-BC Series

- All-in-one display solution with embedded MagicInfo Player S4 powered by Tizen™
- IP5x certification and non-glare panel to withstand a range of environmental conditions
- Sleek design with slim depth (29.9mm) and narrow bezels (6.9mm)

Specification

Diagonal size	32 inch	Panel Type	5-V5
Resolution	1920x1080	Pixel Pitch (HxV)	0.36(H) x 0.36(V)mm
Brightness (Typical)	300	Contrast Ratio	5,000:1
Viewing Angle (H/V)	178/178	Response Time	8ms
Color Gamut	72%	Glass Type	ESG (with touch glass)
H-Scanning Frequency	30 ~ 80kHz	Maximum Pixel Frequency	148.5MHz
V-Scanning Frequency	60 ~ 75Hz	Contrast Ratio (Dynamic)	MFGA DCR



Samsung Professional Display PMF Series

- All-in-one display solution with embedded MagicInfo Player S4 powered by Tizen™
- IP5x certification and non-glare panel to withstand a range of environmental conditions
- Sleek design with slim depth (29.9mm) and narrow bezels (6.9mm)

Specification

Diagonal size	32 inch	Panel Type	60Hz E-LED BLU
Resolution	1920x1080	Pixel Pitch (HxV)	0.36(H) x 0.36(V)mm
Active Display Size (HxV)	698.4(H) x 392.8 (V)	Contrast Ratio	5,000:1
Viewing Angle (H/V)	178/178	Response Time	8ms
Display Color	18bit	Color Gamut	72%
H-Scanning Frequency	30 ~ 80kHz	Maximum Pixel Frequency	148.5MHz
V-Scanning Frequency	60 ~ 75Hz	Brightness	400nits

Scan for more information and order



DigiSign Digital Signage
Product Lineup

DigiSign Signage Floorstand Non Interactive



DigiSign Floorstand 55s

Available Options :

- Color : Black / White
- Screen Size : 55 Inch
- Resolution : 3840 x 2160 (4K UHD)
- Brightness : 500 Nit
- Display size : 1213.80(H) x 684.40(V)



DigiSign Floorstand 50s

Available Options :

- Color : Black / White
- Screen Size : 50 Inch
- Resolution : 3840 x 2160 (4K UHD)
- Brightness : 500 Nit
- Display size : 1130(H) x 623.50(V)



DigiSign Floorstand 43s

Available Options :

- Color : Black / White
- Screen Size : 43 Inch
- Resolution : 3840 x 2160 (4K UHD)
- Brightness : 500 Nit
- Display size : 1720x806x500mm

DigiSign Signage Floorstand Interactive



DigiSign Floorstand 55s Touchscreen

Available Options :

- Color : Black / White
- Screen Size : 55 Inch
- Resolution : 3840 x 2160 (4K UHD)
- Brightness : 500 Nit
- Touchscreen : Infrared 10-touch point



DigiSign Floorstand 50s Touchscreen

Available Options :

- Color : Black / White
- Screen Size : 50 Inch
- Resolution : 3840 x 2160 (4K UHD)
- Brightness : 500 Nit
- Touchscreen : Infrared 10-touch point



DigiSign Floorstand 43s Touchscreen

Available Options :

- Color : Black / White
- Screen Size : 43 Inch
- Resolution : 3840 x 2160 (4K UHD)
- Brightness : 500 Nit
- Touchscreen : Infrared 10-touch point

DigiSign Interactive Table



DigiSign Floorstand 55s Touchscreen

Available Options :

- Color : Black / White
- Screen Size : 55 Inch
- Resolution : 3840 x 2160 (4K UHD)
- Brightness : 500 Nit
- Touchscreen : 10 Points IR Touch



DigiSign Floorstand 50s Touchscreen

Available Options :

- Color : Black / White
- Screen Size : 50 Inch
- Resolution : 3840 x 2160 (4K UHD)
- Brightness : 500 Nit
- Touchscreen : 10 Points IR Touch



DigiSign Floorstand 43s Touchscreen

Available Options :

- Color : Black / White
- Screen Size : 43 Inch
- Resolution : 3840 x 2160 (4K UHD)
- Brightness : 500 Nit
- Touchscreen : 10 Points IR Touch

Microvision

Realizing Your Full Idea

Digital Signage Product Lineup



MICROVISION 55 Inch Digital Signage MV-U55SK-AT

Specification :

- Screen Size : 55 inch
- Resolution : 1920 x 1080 (FHD)
- Brightness : 350 Nit
- Storage : 2GB RAM 8GB
- Frame material Aluminium Panel protection Full face tempered glass, Operating System : Android

Vestouch Digital Signage Touchscreen Monitor 32"

- Display Screen: 32 Inch
- Resolution : 1920 x 1080
- Brightness : 400 cd/m2
- Input : HDMI + VGA + DVI + USB

Vestouch Digital Signage Touchscreen Monitor 49"

- Display Screen: 49 Inch
- Resolution : 1920 x 1080
- Brightness : 450 cd/m2
- Input : HDMI + VGA + DVI + USB

Vestouch Digital Signage Touchscreen Monitor 43"

- Display Screen: 43 Inch
- Resolution : 1920 x 1080
- Brightness : 450 cd/m2
- Input : HDMI + VGA + DVI + USB

Vestouch Digital Signage Touchscreen Monitor 55" DSN-TSM-004

- Display Screen: 55 Inch
- Resolution : 1920 x 1080
- Brightness : 450 cd/m2
- Input : HDMI + VGA + DVI + USB

Sustainable Energy

Safety Design for Energy Resource

21:9 Widescreen Display Optimized for Business Environments

It provides a resolution that's more than 4 times higher than FHD, making the viewer satisfied visually. With a resolution of 5,120 x 2,160 and a high pixel density, every single detail of the display screen is conveyed accurately and vividly.

Stretch Signage

- Screen Size : 105"
- Resolution : 5,120 x 2,160 (5K)
- Brightness (Typ.) : 400 nit
- 21:9 Wide Screen
- Proximity Sensor
- Wireless ScreenShare



Product Lineup



Screen size : 65", 55", 49", 43"

UHD Signage Display 65UM5N-E

- Resolution : 3,840 x 2,160 (UHD)
- Brightness (Typ.) : 500 nit
- Surface Treatment (Haze) : 28 %
- Bezel Width : 12.4 mm (T/R/L/B)
- Interface : HDMI(3) / DP / USB 2.0 / RS232C / RJ45 / Audio / IR



Screen size : 65", 55", 49", 43"

UHD Signage Display 65UM5N-E

- Resolution : 3,840 x 2,160 (UHD)
- Brightness (Typ.) : 700 nit
- Surface Treatment (Haze) : 28 %
- Bezel : 8.9 mm (T/R/L), 12.9 mm (B)
- Interface : HDMI(3) / DP / USB 2.0 / RS232C / RJ45 / Audio / IR
- webOS Smart Platform



UHD Signage 65US5P-E

- Resolution : 3,840 x 2,160 (UHD)
- Brightness (Typ.) : 500 nit
- Surface Treatment (Haze) : 28 %
- webOS Smart Platform
- Energy efficiency
- Enhanced Security
- Screen size : 65"



webOS UHD Signage

- Resolution : 3,840 x 2,160 (UHD)
- Brightness (Typ.) : 400 nit
- Color Gamut : DCI-B95
- Refresh rate : 60Hz
- Screen size : 55", 50", 43"



UHD High Haze Standard Signage

- Resolution : 3,840 x 2,160 (UHD)
- Brightness (Typ.) : 500 nit
- Color Gamut : 97.709 95%
- Refresh rate : 120Hz
- Screen size : 88", 75", 66", 55", 49", 43"



Touch Open Frame 55TNF5J-B

- Resolution : 3,840 x 2,160 (UHD)
- Brightness (Typ.) : 450 nit
- Color Gamut : NTSC 72%
- Refresh rate : 60Hz
- Screen size : 55", 50", 43"
- Touchscreen

Goodview

A OTE COMPANY

Goodview AD Display Floorstand 49 inch

- Display Screen : 49 Inch
- Resolution : 1080 x 1920 px
- Product Size : 734(H) x 1837(V) x 100(D)
- Display Size : 604(H) x 1073.78(V)
- Brightness : 450cd/m2
- Supported Media Format : JPG, PNG, BMP, AVI, MKV, MP4, FLV, MPG

Goodview AD Display Floorstand 55 inch

- Display Screen : 55 Inch
- Resolution : 1080 x 1920 px
- Product Size : 807(H) x 1947(V) x 100(D)
- Display Size : 680.4(H) x 1209.6(V)
- Brightness : 450cd/m2
- Supported Media Format : JPG, PNG, BMP, AVI, MKV, MP4, FLV, MPG

Goodview AD Display 49 inch Capacitive

- Display Screen : 49 Inch
- Resolution : 1920x1080 px
- Product Size : 685(H) x 1870(V) x 41.2(D) mm
- Display Size : 603(H) x 1072.78(V) mm
- Brightness : 450cd/m2
- Touch Overlay : 10 points capacitive
- Operating System : Android
- Available color : Black / White

Goodview AD Display 55 inch Capacitive

- Display Screen : 55 Inch
- Resolution : 1920x1080 px
- Product Size : 744(H) x 1938(V) x 41.2(D) mm
- Display Size : 681.4(H) x 1210.6(V) mm
- Brightness : 450cd/m2
- Touch Overlay : 10 points capacitive
- Operating System : Android
- Available color : Black / White

Goodview AD Display Touchscreen 22 Inch

- Display Screen : 22 Inch
- Resolution : 1920 x 1080
- Brightness : 250 cd/m2
- Touch Type : Capacitive 10 Points
- Operating System : Android 7.1
- Memory : DDR3 2GB
- Storage : 8GB
- Product Size : 529.6(H) x 321(V) x 42.3(D)
- Display Size : 476(H) x 268.4(V)
- Vesa : 400 x 200 mm

Goodview AD Display 22 Inch Non Touchscreen

- Display Screen : 22 Inch
- Resolution : 1920 x 1080
- Brightness : 250 cd/m2
- Touch Type : Capacitive 10 Points
- Operating System : Android 7.1
- Memory : DDR3 2GB
- Storage : 8GB
- Product Size : 526.8(H) x 321(V) x 42.3(D)
- Display Size : 476(H) x 268.4(V)
- Vesa : 400 x 200 mm

Goodview AD Display Touchscreen 32 Inch

- Display Screen : 32 Inch
- Resolution : 1920 x 1080
- Brightness : 400 cd/m2
- Touch Type : Capacitive 10 Points
- Operating System : Android 7.1
- Memory : DDR3 2GB
- Storage : 8GB
- Product Size : 767.8(H) x 462.3(V) x 48.3(D)
- Display Size : 597.4(H) x 391.9(V)
- Vesa : 400 x 200 mm

Goodview AD Display 32 Inch Non Touchscreen

- Display Screen : 32 Inch
- Resolution : 1920 x 1080
- Brightness : 400 cd/m2
- Touch Type : Capacitive 10 Points
- Operating System : Android 7.1
- Memory : DDR3 2GB
- Storage : 8GB
- Product Size : 767.8(H) x 462.3(V) x 48.3(D)
- Display Size : 597.4(H) x 391.9(V)
- Vesa : 400 x 200 mm

Scan for more information and Order



Ordering Information



Papan Informasi Digital Signage Provent PIM – 554K

- Screen Size : 43", 55", 65", 75", 86", 98"
- Brightness (Cd/m2) : 350, 350, 450, 450, 400, 500
- Resolution : 4k 60hz
- Aspect Ratio : 16:9
- Fhd 1920x1080 & Ultra-Hd 3840x2160
Display Resolution Makes Perfect And Vivid Picture
- Aluminum Frame With Narrow Bezel 28mm & Bezel
Colors Customized Available



Papan Informasi Digital Signage Provent PRV – 55KWT PDN

- Screen Size : 43", 55", 65", 75", 86", 98"
- Brightness (Cd/m2) : 350
- Resolution : 4k 60hz
- Aspect Ratio : 16:9
- Touch Screen 10 Fingers
- Ratio : 1200:1
- Interactive Content
(Swipe, Slide, Touch, Web, Data) Available



Papan Informasi Digital Signage Provent PRV-KT55I (Touch)

- Screen Size : 55"
- Brightness (Cd/m2) : 350, 350, 450, 450, 400, 500
- Resolution : 4k 60hz
- Aspect Ratio : 16:9
- Fhd 1920x1080 & Ultra-Hd 3840x2160
Display Resolution Makes Perfect And Vivid Picture
- Aluminum Frame With Narrow Bezel 28mm & Bezel
Colors Customized Available



Interactive Flat Panel

Product Lineup

Interact, Collaborate, Engage
with ICE Board Interactive Flat Panel



Interactive Flat Panel Ice Board V Series



10 Points Touch



USB Type C



Anti Glare



High Quality Sound System



4K Ultra HD



Android / Windows

Specification :

Size : 65", 75", 86"

System : Android 9.0

RAM : 4GB

Brightness : 350 cd/m2

Overall Power : 450 - 650 W



Interactive Flat Panel Ice Board E Series

Hybrid Teaching Solution

- Collaborative distance learning in or outside the classroom
- Cloud-based virtual classroom
- Built for collaboration and instruction
- Remote administration platform
- Take collaborative learning to the next level

Specification :

Size : 65", 75", 86", 98"

System : Android 11 - 13

RAM : 8GB

Brightness : 400 - 500 cd/m2

Overall Power : 200 - 660 W

MAXHUB



MAXHUB V6 Classic Series

Professional display screen with high color accuracy, like every things is real

4K Ultra HD | 90% Color Gamut | E2 Color Accuracy | Anti-glare

48-megapixel cameras, like just standing in front of you

48MP | WDR Anti-backlight | 8 Mic Arrays | 10Wx2 + 20W Speaker | AI Noise Reduction

High-precision infrared touch, making your writing smoother
Intelligent Gesture | OCR* Intelligent Graphics | Real-time Storage

Born to be strong, fluent, and stable

High-performance processor | Wireless Network



MAXHUB V6 ViewPro Series

Picture-Perfect Performance

4K Ultra HD | 90% Color Gamut | 8E+2 Color Accuracy | Anti-glare | Zero Parallax

Virtually Face-to-Face

48MP + 8MP dual-camera | WDR Anti-backlight | 3X optical zoom | Speaker-Tracking | Auto-Framing

Focused, Noise-Free Meetings

8 Array Microphones | 180° Wide Angle | 12 meter Pick Up Range | Automatic Gain Control | Acoustic Echo Cancellation | Full Duplex

Immersive Surround Sound

High-performance processor | Wireless Network

Sustainability in Design

ENERGY STAR-certified



MAXHUB V6 Transcend Series

Privacy is the Priority

48MP + 8MP dual-camera | WDR Anti-backlight | 3X optical zoom | Speaker-Tracking | Auto-Framing | Flip-over Camera

Functional Integration

4K Ultra HD | 90% Color Gamut | 8E+2 Color Accuracy | Anti-glare | Zero Parallax

Functional Integration

8 Array Microphones | 180° Wide Angle | 8 meter Pick Up Range | Automatic Gain Control | Acoustic Echo Cancellation | Full Duplex

Life Write

P-CAP Touch Technology

Sustainability in Design

ENERGY STAR-certified

Specification	C5530	C6530	C7530	C8630	V6530	V8630	T6530	T8630
Display								
Size	55 inch	65 inch	75 inch	86 inch	65 inch	86 inch	65 inch	86 inch
Ratio	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9
Display Area	1209.60x804.0mm	1428.48x803.52mm	1650.24x928.26mm	1895.04x1065.96mm	1428.48x803.52mm	1996.18x977mm	1428.48x803.52mm	1895.04x1065.96mm
Resolution	3840x2160	3840x2160	3840x2160	3840x2160	3840x2160	3840x2160	3840x2160	3840x2160
Contrast Ratio	1200:1	1200:1	5000:1	4000:1	5000:1	1200:1	4000:1	4000:1
Viewing Angle	178° (H/V)	178° (H/V)	178° (H/V)	178° (H/V)	178° (H/V)	178° (H/V)	178° (H/V)	178° (H/V)
Colour Gamut	90% NTSC	90% NTSC	90% NTSC	90% NTSC	90% NTSC	90% NTSC	90% NTSC	90% NTSC
Backlight Structure	DLED	DLED	DLED	DLED	DLED	DLED	ELED	ELED
Lifespan	≥30,000 hours	≥30,000 hours	≥30,000 hours	≥30,000 hours	≥30,000 hours	≥30,000 hours	≥30,000 hours	≥30,000 hours
Touch System								
Touch Principle	Infrared	Infrared	Infrared	Infrared	Infrared	Infrared	PCAP	PCAP
Touch Points					20 Points			
Supported Systems					Windows 10/8/7/XP			
					Android/Linux/macOS X/Chrome			



MAXHUB V5 Classic Series

Screen size : 55", 65", 75", 86"
Resolution : 3840 x 2160
Refresh rate : 60 Hz
Brightness : 350 cd/m2
Color Gamut : 90% NTSC
Touch Principle : Infrared
20 Touch Points
Supported System : Windows, Android



MAXHUB V5 Transcend Series

Screen size : 65", 86"
Resolution : 3840 x 2160
Refresh rate : 60 Hz
Brightness : 350 cd/m2
Color Gamut : 72% NTSC
Touch Principle : P-CAP
20 Touch Points
Supported System : Windows, Android



MAXHUB Edu E2 Series

Screen size : 65", 75", 86"
Resolution : 3840 x 2160
Touch Technology : Infrared
40 Touch Points
Response time : <10ms
Supported System : Windows



MAXHUB Edu L Series

Screen size : 65", 75", 86"
Resolution : 3840 x 2160
Refresh rate : 60 Hz
Brightness : 350 Nits
Color Gamut : 72% NTSC
Supported System : Windows



BenQ Corporate Series



Corporate Digital Interactive Whiteboard

Size : 65", 75", 86"
Resolution : 3840 × 2160 (UHD)
Brightness : 350 – 450 Nits
Aspect Ratio : 16:9
Color Gamut : 68 – 72% NTSC



DuoBoard Corporate Interactive Flat Panel

Size : 65", 86"
Resolution : 3840 × 2160 (UHD)
Brightness : 320 – 350 Nits
Aspect Ratio : 16:9
Color Gamut : 68% NTSC



BenQ Board Pro

Size : 65", 75", 86"
Resolution : 3840 × 2160 (UHD)
Brightness : 400 – 450 Nits
Aspect Ratio : 16:9
Color Gamut : 72% NTSC

BenQ Education Series



4K UHD Display Interactive Flat Panel Education Series

Size : 65", 75", 86"
Resolution : 3840 × 2160 (UHD)
Brightness : 350 Nits
Aspect Ratio : 16:9
Color Gamut : 65% NTSC



BenQ Interactive Display

Size : 65", 75", 86", 98"
Resolution : 3840 × 2160 (UHD)
Brightness : 400 – 550 Nits
Aspect Ratio : 16:9
Color Gamut : 68 – 72% NTSC



Education Interactive Flat Panel Display

Size : 55", 65", 75", 86"
Resolution : 3840 × 2160 (UHD)
Brightness : 400 Nits
Aspect Ratio : 16:9
Color Gamut : 68% NTSC



Germ Resistant Education Interactive Flat Panel

Size : 65", 75", 86"

Resolution : 3840 × 2160 (UHD)

Brightness : 350 – 450 Nits

Aspect Ratio : 16:9

Color Gamut : 68 – 72% NTSC



BenQ Interactive Display Seri Unggulan

Size : 65", 75", 86"

Resolution : 3840 × 2160 (UHD)

Brightness : 400 – 450 Nits

Aspect Ratio : 16:9

Color Gamut : 72% NTSC



Education Interactive Flat Panel Display Pro Series

Size : 55", 65", 75", 86"

Resolution : 3840 × 2160 (UHD)

Brightness : 400 – 450 Nits

Aspect Ratio : 16:9

Color Gamut : 72% NTSC



PROVENT



PROVENT 75 INCH INTERACTIVE FLAT PANEL IFP-75UHD

4K Resolution Interactive Flat Panel
Dual Operating System Android 8 (3 GB RAM / 16 GB Storage)
Windows 10 (intel i7, 4 GB RAM, 128 GB Storage)
15ms fast response +/- 0.5mm
touch accuracy 10 touch point



PROVENT 86 INCH INTERACTIVE FLAT PANEL IFP-86UHD

4K Resolution Interactive Flat Panel
Dual Operating System Android 8 (3 GB RAM / 16 GB Storage)
Windows 10 (intel i7, 4 GB RAM, 128 GB Storage)
15ms fast response +/- 0.5mm
touch accuracy 10 touch point

Promethean



ActivPanel 9

Screen Size and Resolution	65" 4K, UHD (3840 x 2160 @ 60 Hz) 75" 4K, UHD (3840 x 2160 @ 60 Hz) 86" 4K, UHD (3840 x 2160 @ 60 Hz)
Screen Type	TFT LCD (Direct LED Backlight)
Blue Light Reduction	Yes
Bonded Glass	Yes
Aspect Ratio	16:9
Display Area	65" 4K: 1429 x 804 mm (56.3 x 31.7 in) 75" 4K: 1652 x 930 mm (65 x 36.6 in) 86" 4K: 1895 x 1066 mm (74.6 x 41.9 in)
Display Colors	1.07 Billion (10-bit)
LCD Viewing Angle	178°
LCD Response Time	8 ms
LCD Refresh Rate (Panel)	60 Hz
LCD Brightness (Brightness of display without cover glass)	455 cd/m ²



ActivPanel 9 Premium

Screen Size and Resolution	65" 4K, UHD (3840 x 2160 @ 60 Hz) 75" 4K, UHD (3840 x 2160 @ 60 Hz) 86" 4K, UHD (3840 x 2160 @ 60 Hz)
Screen Type	TFT LCD (Direct LED Backlight)
Blue Light Reduction	Yes
Bonded Glass	Yes
Aspect Ratio	16:9
Display Area	65" 4K: 1429 x 804 mm (56.3 x 31.7 in) 75" 4K: 1652 x 930 mm (65 x 36.6 in) 86" 4K: 1895 x 1066 mm (74.6 x 41.9 in)
Display Colors	1.07 Billion (10-bit)
LCD Viewing Angle	178°
LCD Response Time	8 ms
LCD Refresh Rate (Panel)	60 Hz
LCD Brightness (Brightness of display before cover glass)	455 cd/m ²



Product lineup



Interactive Digital Board TR3BG-B

Screen size : 55 inch
Resolution : 3840 x 2160
Refresh rate : 60Hz
Brightness : 310 Nit



Interactive Digital Board TC3D-B

Screen size : 55", 75"
Resolution : 3840 x 2160
Refresh rate : 60Hz
Brightness : 310 Nit



SPC INTERACTIVE FLAT PANEL

SPC-EB-65


Screen size : 65 inch Touch
Resolution : 3840 x 2160 (4K)
Refresh rate : 60Hz

SPC-EB-75

Screen size : 75 inch Touch
Resolution : 3840 x 2160 (4K)
Refresh rate : 60Hz

SPC-EB-86

Screen size : 86 inch Touch
Resolution : 3840 x 2160 (4K)
Refresh rate : 60Hz

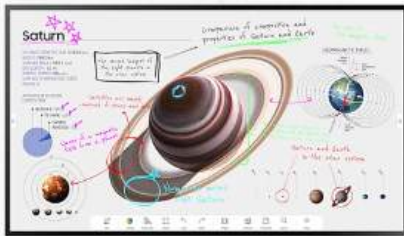

SAMSUNG

Interactive Display Flip Pro

WM55B

Screen Size : 55"
Brightness : 350 Nit
Resolution : 3840 x 2160
Color Gamut : 72%

WM65B

Screen Size : 65"
Brightness : 350 Nit
Resolution : 3840 x 2160
Color Gamut : 72%

WM75B

Screen Size : 75"
Brightness : 350 Nit
Resolution : 3840 x 2160
Color Gamut : 72%

WM85B

Screen Size : 85"
Brightness : 350 Nit
Resolution : 3840 x 2160
Color Gamut : 72%



Horion M3A Series



55M3A 55 Inch



65M3A 65 Inch



75M3A 75 Inch



86M3A 86 Inch



98M3A 98 Inch

Horion M5A Series



65M5A 65 Inch



75M5A 75 Inch



86M5A 86 Inch



65M5A PRO
65 Inch



75M5A PRO
75 Inch



86M5A PRO
86 Inch

Horion M5A Pro Series

Horion K6A Series



65K6A 65 Inch



75K6A 75 Inch



86K6A 86 Inch

ViewSonic

ViewBoard

Screen Size : 65", 75", 86"
Resolusi : UHD 3840 x 2160
Brightness : 400 Nits

RAM 8GB, Storage 64GB
TFT LCD Module with DLED
Backlight, IPS

Screen Size : 65", 75", 86"
Resolusi : UHD 3840 x 2160
Brightness : 350 Nits

RAM 4GB, Storage 32GB
TFT LCD Module with DLED
Backlight

ViewSonic

Flagship





Conference System

Product Lineup

logitech

RALLY BAR

Video bar all-in-one untuk ruangan berukuran medium hingga besar



RALLY BAR HUDDLE

Video bar all-in-one untuk ruang berkumpul dan ruangan kecil



MeetUp

All-in-one conferencemcam untuk ruang konferensi kecil dan ruang berkumpul.



RALLY CAMERA

Kamera PTZ Premium dengan sistem pencitraan Ultra-HD dan kontrol kamera otomatis



BCC950

Webcam, speakerphone, remote untuk kelompok terdiri dari 1-4 orang



LOGITECH SIGHT

Kamera pendamping di atas meja dengan framing multi-peserta yang cerdas.



AVer



CAM520 Pro3
Professional USB 3.1 Conferencing Camera for Mid-to-Large Rooms



Huddle Room Conference Camera
Unbox, unfold, and connect to instantly start a next-generation video communication experience.



4K Conference Camera with Bluetooth® Speakerphone for Medium-to-Large Rooms



Dual Lens PTZ Video Bar
With a Hybrid 18X Zoom for Medium & Large Rooms



All in one USB 4K UHD Huddle Room Camera and Audio



4K Video Bar with Intelligent Lighting for Huddle Rooms



Tenveo
NDI HDMI USB RJ45 SDI camera PTZ Video Conference Room Camera



Tenveo
USB HDMI optical zoom video conference PTZ camera



Tenveo
Broadcasting USB camera optical zoom 1080p remote control PTZ camera



Tenveo
4K auto-framing wide angle fullHD crystal clear webcam with Sony Sensor



Tenveo
VA300C 4K EPTZ Webcam Conference Webcam



Tenveo
Panorama 360° All-in-one Conference webcam



Tenveo
All-in-one Conference camera with auto framing function



Tenveo
Bluetooth wireless voice pickup range full-duplex omnidirectional speakerphone



Tenveo
Automatic noise-reduction USB video and audion conference speakerphone for conference system



Tenveo
Daisy-chain bluetooth connection full duplex noisefree 360° voice pickup speakerphone



Tenveo
USB Video Conference Camera 3X Optical Zoom



Tenveo
Wall mounted USB video conference camera with remote control

KANDAO



Kandao Meeting Ultra

Main Device : Length : 368mm
Width : 156.6mm (Screen Folded)
428mm (Screen Unfolded)
Height : 327mm | Weight : 4190g
Touchscreen : Size : 15.6 Inch LED Display
Quantity : Two
Touch Control : Dual 10-Point Capacitive Touch
Display Resolution : 1920 x 1080 60Hz
Camera : 3840*2160@30fps
1920*1080@30fps
1280*720@30fps



Kandao Meeting Ultra Standard

Main Device : Length : 215mm
Width : 121mm
Height : 327mm | Weight : 2161g
Touchscreen : Size : 15.6 Inch LED Display
Quantity : Two
Touch Control : Dual 10-Point Capacitive Touch
Display Resolution : 1920 x 1080 60Hz
Camera : 3840*2160@30fps
1920*1080@30fps
1280*720@30fps



Kandao Meeting

Resolution of Lens : 4000*3000@25fps
Resolution of stitched video : 1920*1080@25fps
Video Bitrate : 30M
Dimensions : 125mm*285mm
Microphone : 8 built-in microphones
Speaker : 2*10W speakers
Weight : 1484g



Kandao Meeting Pro

Size : Outer diameter of main device: 78.2 mm
Height: 262.6 mm
Remote controller Height: 160 mm
Width: 42 mm; Thickness: 21 mm
Resolution : 1920*1080/1280*720
Speaker : 5W, for audio output.
Microphone : 8 Built-in microphones and 8 beam forming



Kandao Meeting S

Size : Outer diameter of main device: 78.2 mm
Height: 256.5mm;
Remote controller Height: 160 mm
Width: 42 mm; Thickness: 21 mm
Resolution : 1920*1080/1280*720
Speaker : 5W, for audio output.
Microphone : 8 Built-in microphones and 8 beam forming elements.

Kandao Meeting Omni



Solutions to Multi-System Collaboration for Large Meeting Rooms



CI-T21H Auto-Tracking PTZ Camera

Automatic Tracking and Hands-FREE Control
 Max. Resolution: 1920x1080 @ 60fps (IP Streaming)
 1920x1080 @ 60fps (HDMI/USB 3.0)
 View Angle: 60.9° (wide) ~ 6.43° (tele)
 Dimension: 126.7 x 151.2 x 180 mm



CI-T10 Auto-Tracking PTZ Camera

Automatic Tracking and Hands-FREE Control
 Max. Resolution: 1920x1080 @ 30fps (IP Streaming/ USB 2.0)
 View Angle: Horizontal: 55.5° ~ 6.5°
 Vertical: 35.1° ~ 3.6°
 Dimension: 141.5 x 151 x 168 mm



CI-22H PTZ Conferencing Camera

Max. Resolution: 1920x1080 @ 60fps (IP Streaming)
 1920x1080 @ 60fps (HDMI/USB 3.0)
 View Angle: 55.8° (wide) ~ 3.2° (tele)
 Dimension: 158 x 208.5 x 173.5 mm



CI-21H PTZ Conferencing Camera

Max. Resolution: 1920x1080 @ 60fps (IP Streaming)
 1920x1080 @ 60fps (HDMI/USB 3.0)
 View Angle: 80.9° (wide) ~ 6.43° (tele)
 Dimension: 131 x 151 x 180 mm
 Pan/Tilt Rotation: ~135°~+135°, ~30°~+30°

MAXHUB



MAXHUB UC M40

Camera
 Image Sensor: 1/2.7" CMOS
 Effective pixels: 9M
 Maximum frame rate: 30FPS @ 1080P @ 30fps
 Focal length: 3.6mm
 Field of view: 90°(D), 10°(H), 40°(V)
Microphone
 Quantity: Built-in 4 array omnidirectional
 Signal to noise ratio: 65dB
 Pickup range: 5m (radius)
 Response frequency: 200Hz to 8kHz
Speaker
 Quantity: 1
 Rated power: 10W
 Sound pressure level: 75dB@1m (1kHz)
 Signal to noise ratio: 175dB



MAXHUB UC M31

Camera
 Effective pixels: 5 MP
 Encode format: H.264, H.265, VVC
 Focal length: 3.6mm
 Depth of Field (DOF): 0.5-5m
 Minimum field of view (fov): 180°
Microphone
 Quantity: 3 Array
 Pick-up distance: 5-4m
Physical Specification
 Dimensions: 144.5x93x57.7mm



MAXHUB UC P25

Camera
 Sensor: 1/2.5 inch CMOS, Max Effective Pixel: 8.5M
 Optical Zoom: 12x (1 ~ 4.4mm ~ 52.8mm, F1.8 ~ F2.8)
 Digital Zoom: 16x
 Video Format: H.264 AVC, max to 3840p@60fps
 H.265 AVC, max to 2880p@30fps
 MJPEG, max to 2880p@30fps
 Horizontal Angle of View: 79°
 Vertical Angle of View: 42.2°
 Diagonal Angle of View: 92.8°
 Horizontal Rotation Range: +170°
 Vertical Rotation Range: +30°



MAXHUB UC P15

Camera
 Full HD (1080P) CMOS 2.07M Pixel
 Progressive Scanning
 12x Optical Zoom
 180° Total Zoom (Max Digital)
 Lens: 15.5mm ~ 43.5mm, F1.8 ~ F2.8
 Min. Illumination: 0.5Lux @ F1.8, AGC ON
 Encoder: H.264 ~ H.265
 White Balance: Auto, P, AWB, Outdoor, One Push, Manual, VBS
 Video: 576p ~ 1080p
 Horizontal Angle of View: 71.5° ~ 8.3°
 Vertical Angle of View: 44.8° ~ 3.3°
 Diagonal Angle of View: 85.2°
 Pan: ±170°



MAXHUB UC S07

Camera
 Pixel: 12 MP
 Sensor: 1/2.3-inch 12MP Sony sensor
 200M: 5x digital zoom
 Output format: H.264, H.265, H.266
 Field of View: 100°(D)
 Adjustable Angle: ±10°(V)
 Dimensions (x H x D): 480 x 76 x 93 mm
 Net Weight: 105g (3.74oz)
Speakers
 Stereo Channel: 11
 Output Power: 8W x 5W
Microphone
 Microphone Quantity: 6
 Voice Pickup Range: 8m



MAXHUB UC S15

Camera
 Pixel: 12 MP
 Sensor: 1/2.3-inch 12MP Sony sensor
 Field of View: 100°(D)
 Zoom: 5x digital zoom
 Video Output (H.265/H.264): 3840 x 2160 @ 30fps
 (with USB 3.0 cable)
 Video Output (H.265/H.264): 1080p @ 30fps
Audio
 Microphone: 6 MEMS Microphone
 Speaker Output Power: 1W
 Speaker Volume: 53 dB @ 1m
 Sensitivity: >75 dB
 Speaker Frequency Range: 20Hz ~ 18 kHz



MAXHUB UC P30

PTZ Camera
 Image Sensor: Sony 4K, 8.42M Pixel
 Optical Zoom: 12x
 Digital Zoom: 16x
 Lens Focal Length: 4.5mm ~ 57.6mm
 Lens Aperture: F1.8 ~ F2.8
Peripherals Camera
 MCU: Sony Sensor
 120 FPS/1080P
 Manual PTZ: ±10°
 Electric Privacy Cover
 Camera LED Indicator



MAXHUB UC BM35

Microphone
 Quantity: 8
 Voice Pickup Range: 8m
 Type: Digital Microphone
 Frequency Range: 100Hz ~ 7.5kHz
 Bluetooth: 100m ~ 7.5kHz
Speaker
 Stereo Channel: 11
 Output Power: 8W x 2W
 Maximum Sound Pressure Level: 85dB@1m
 Distortion: <1% (20Hz-20kHz)
 <1% (30Hz-20kHz)
 <1% (40Hz-20kHz)
 Signal to Noise Ratio: >75dB
 Frequency Range: 100Hz-20kHz



The most feature-rich all-in-one conferencing devices in their class.



TeamConnect Bar Medium




TeamConnect Bar Small

General	
Dimensions (L x W x H)	750 x 71 x 95 mm
Weight	2.5 kg
Operating temperature range	0 °C to 40 °C 32 °F to 104 °F
Storage temperature range	-25 °C to 70 °C -13 °F to 158 °F
Relative humidity operation	0 to 75 %, non-condensing
Relative humidity storage	0 to 95 %, non-condensing
DC IN	15 V ~, max. 4 A
Max. power consumption	72 W
Voltage range PoE (PSE)	44.0 - 57.0 V ~ (IEEE 802.3af Type 1, PoE)
Loadspeaker	
Number of speakers	4 full range loudspeakers with passive radiator
Dimensions	50 mm (2")
Frequency response	100 Hz - 18 kHz
THD at max. output	< 5 %
Amplifier	Class-D
Max. SPL (output)	84 dB SPL
Total Audio Power (RMS/PEAK)	20 W / 40 W

Microphones	
Transducer principle	MEMS
Pick-up pattern	Beamforming Array
Number of microphones	8
Frequency range	100 Hz to 14.5 kHz
Pickup range	4.5 m
Dynamic range	69 dB (A)
Camera	
Resolution	4K@2160p (4K), 1080p, 720p, 960x480, 848x480, 640x480, 640x260, 432x240
Zoom	certified optional 1.5x digital (Microsoft Teams), 5x digital
Technology	4KPTZ
Diagonal field of view	120°
Horizontal field of view	119°

INTERFACES AND CONNECTIONS



General	
Dimensions (L x W x H)	450 x 71 x 76 mm
Weight	1.5 kg
Operating temperature range	0 °C to 40 °C 32 °F to 104 °F
Storage temperature range	-25 °C to 70 °C -13 °F to 158 °F
Relative humidity operation	0 to 75 %, non-condensing
Relative humidity storage	0 to 95 %, non-condensing
DC IN	15 V ~, max. 2 A
Max. power consumption	30 W
Voltage range PoE (PSE)	42.5 - 57.0 V ~ (IEEE 802.3af Type 2, PoE+)
Loadspeaker	
Number of speakers	2 full range loudspeakers with passive radiator
Dimensions	50 mm (2")
Frequency response	100 Hz - 18 kHz
THD at max. output	< 5 %
Amplifier	Class-D
Max. SPL (output)	80 dB SPL
Total Audio Power (RMS/PEAK)	10 W / 20 W

Microphones	
Transducer principle	MEMS
Pick-up pattern	Beamforming Array
Number of microphones	8
Frequency range	100 Hz to 14.5 kHz
Pickup range	4.5 m
Dynamic range	69 dB (A)
Camera	
Resolution	4K@2160p (4K), 1080p, 720p, 960x480, 848x480, 640x480, 640x260, 432x240
Zoom	certified optional 2x digital (Microsoft Teams), 5x digital
Technology	4KPTZ
Diagonal field of view	120°
Horizontal field of view	119°



Audio System

Product Lineup



Voice clarity and comfort for any speaking scenario **TOA** Digital Wireless Systems



- Signal stability is assured using the digital diversity method.
- TOA's proprietary digital audio processing ensures optimal sound quality and intelligibility for speech applications.
- Dedicated maintenance software enables visual monitoring of any jam radio waves or changes to incoming radio waves.
- Up to 142 selectable channels
- Approx. 100 m operating range (line of sight)
- Control of peripherals is possible using contact output.
- 8-hours operations with single AA battery

WT-D5800



Receiver
WT-D5800



Handheld Transmitter
WM-D5200



- Frequency channel scan
- Feedback suppression
- Detachable antenna
- Antenna mixing with cascading antenna connectivity
- Intrusive LCD display
- Audio mixing with cascading voice input connectivity
- Built-in optimized preset equalization in microphones
- Lightweight body
- Selectable microphone sensitivity
- Selectable transmission output (1 mW/10 mW)
- 3-step battery life indicator
- Built-in antenna
- 1 AA battery provides up to 8 hours of continuous use
- Dedicated rechargeable (NiH2 = nickel-hydrogen) battery or an AA alkaline battery can be used

Beltpack Transmitter
WM-D5300



- Ultra slim and lightweight body
- Selectable microphone sensitivity
- Selectable transmission output (1 mW/10 mW)
- 3-step battery life indicator
- 1 AA battery provides up to 8 hours of continuous use
- Dedicated rechargeable (NiH2 = nickel-hydrogen) battery or an AA alkaline battery can be used

TOA Pro Audio Sound



Z-7B-HX-AS



Z-FB152B-AS



Z-7B-HX-AS 2 Module

Z-7B-HX-AS, Z-7B-HX-AS 2 Module & Z-FB152B-AS

DA-1250D



Power: 100-240 V AC, 50/60Hz
AMP system: Class D
Power Consumption: 1,100W (2/3 rated, 802ch)
Input Ch 1-2: 0dBu (1.75V) / 0dBV (1.0V) / 32dBV
20kΩ (balanced) / 10kΩ (unbalanced)
Output Ch 1-2: 700W (802) x 2 / 1250W (401) x 2
2,500W (802) x 1 (BT), N4.4 Speaker

DA-1000F



Power: 100-240 V AC, 50/60Hz
AMP system: Class D
Power Consumption: 2,000W (2/3 rated, 802ch)
Input Ch 1-4: 0dBu (1.75V) / 0dBV (1.0V) / 32dBV
20kΩ (balanced) / 10kΩ (unbalanced)
Output Ch 1-4: 650W (802) x 2 / 1000W (401) x 2
2,000W (802) x 1 (BT), N4.4 Speaker



V8-310

Line Array 3-Way Speaker



Power	Tweeter	80W x 2 RMS / 125W x 2 Peak
	Woofer	200W RMS / 300W Peak
	Subwoofer	350W x 2 RMS / 700W x 2 Peak
Impedance		8
Drive Unit	Tweeter	2.5" x 2
	Mid Woofer	8"
	Subwoofer	10" x 2
Frequency Response		30Hz - 18kHz (3dB)
Sensitivity		105dB
Max. Continuous SPL		136dB
Max. Peak SPL		142dB
Dispersion		120° Hor x 9° Ver
Input/Output		2 x NL4R Speaker
Dimension (LxWxH)		700 x 255 x 480mm
Gross Weight		36kg



V8-310

Line Array 3-Way Speaker



Power	700W RMS / 1400W Peak
Impedance	8
Drive Unit	12" Subwoofer / 18" Subwoofer
Frequency Response	33Hz - 300Hz (3dB)
Sensitivity	101dB
Max. Continuous SPL	127dB
Max. Peak SPL	133dB
Dispersion	-
Input/Output	2 x NL4R Speaker
Dimension (LxWxH)	700 x 600 x 730mm
Gross Weight	46g
Rec. Amplifier	1200W/8 - 1400W/8 (FP-1300)






Two-Way ScreenArray™ Cinema Loudspeaker System

Freq. Response (± 3 dB) : 40 Hz - 18 kHz
 Freq. Range (-10dB) : 30 Hz - 18 kHz
 Maximum SPL (1m) : 127dB, @ 1m (3.3 ft) 133db peak
 Crossover Frequency : 1300Hz
 Dimensions (H x W x D) : 1265 x 762 x 450mm (49.8 x 30 x 17.75in)



Two-Way ScreenArray™ Cinema Loudspeaker System

Freq. Response (± 3 dB) : 40 Hz - 19 kHz
 Freq. Range (-10dB) : 30 Hz - 20 kHz
 Maximum SPL (1m) : 130dB, @ 1m (3.3ft) 136 dB peak
 Crossover Frequency : 4722-630Hz 4722N: 800Hz
 Dimensions (H x W x D) : 1265 x 762 x 450mm (49.9 x 30 x 17.75in)

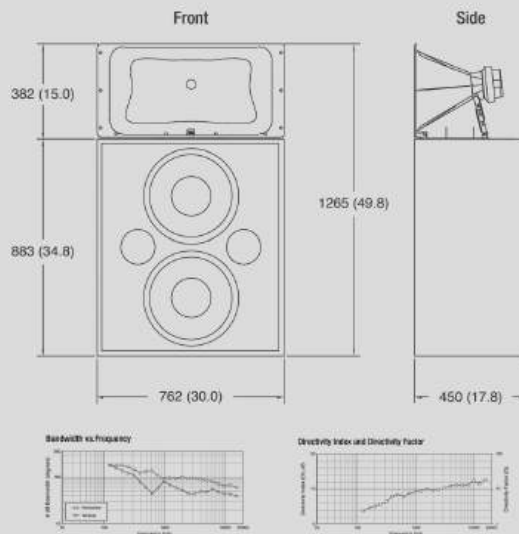

PROFESSIONAL 3-WAY MAIN CINEMA SCREEN SPEAKER

Freq. Range : 50 Hz - 18 kHz
 Maxi SPL (2Pi) : 134 dB
 Crossover : Bi-amp (MF/HF + LF), full passive
 Dimensions (H x W x D) : 455 x 560 x 1218 mm



Three-Way ScreenArray® Cinema Loudspeakers

Frequency Response (± 3 dB) : 40Hz - 19kHz
 Freq. Range : 30Hz - 20kHz
 Maxi SPL (2Pi) : 134 dB
 Dimensions (H x W x D) : 1000 x 1648 x 450 mm
 Sensitivity : 104dB @ 2.83V



Three-Way Biampified or Triamplified(T) ScreenArrayLoudspeaker System

Frequency Response (± 3 dB) : 40Hz - 19kHz
 Freq. Range : 30Hz - 20kHz
 Maxi SPL (1m) : 130 dB @ 1m (3.3 ft), 136 dB peak
 Dimensions (H x W x D) : 2427 x 762 x 450 mm
 Sensitivity : 107 dB, 2.83V @ 1m (3.3 ft)



Three-Way Biampified or Triamplified(T) ScreenArrayLoudspeaker System

Freq. Range : 30 Hz - 20 kHz
 Frequency Response (± 3 dB) : 40 Hz - 19 kHz
 Maxi SPL (1m) : 125 dB @ 1m (3.3 ft), 131 dB peak
 Crossover : 3732-350 Hz 3732-T: 1.2 kHz
 Dimensions (H x W x D) : 1937 x 762 x 450 mm



Three-Way Biampified or Triamplified(T) ScreenArrayLoudspeaker System

Freq. Range : 30 Hz - 20 kHz
 Frequency Response (± 3 dB) : 40 Hz - 19 kHz
 Maxi SPL (1m) : 125 dB @ 1m (3.3 ft), 131 dB peak
 Crossover : 3732-350 Hz 3732-T: 1.2 kHz
 Dimensions (H x W x D) : 1600 x 762 x 450 mm



Three-Way Tri/Bi-Amplified/Passive

Freq. Range : 30 Hz - 18 kHz
 Frequency Response (± 3 dB) : 40 Hz - 18 kHz
 Maxi SPL (1m) : 125 dB @ 1m (3.3 ft), 131 dB peak
 Crossover : 450 Hz, 2 kHz
 Dimensions (H x W x D) : 883 x 762 x 450 mm



Portable PA Systems & Loudspeaker Systems

Focus less on your gear and more on your music with Bose portable PA systems.



F1 Model 812 Flexible Array loudspeaker

F1 Model 812: High impact composite materials
 Frequency response (~ 3 dB): 52 Hz - 16 kHz
 Frequency range (-10 dB): 43 Hz - 20 kHz
 Nominal dispersion: C: 100° H x 40° V
 Maximum SPL @ 1 m: 132 dB SPL (peak)
 Rated power: 1,000 W



Bose S1 Pro Portable Bluetooth® Speaker System

Dimension : 33 cm H x 24.13 cm W x 28.45 cm D (7.1 kg)
 Wireless range up to 30 ft (9 m)
 Up to 11 hours of play using optional rechargeable lithium-ion battery
 Compatible with Bose Connect app



F1 Subwoofer

F1 Subwoofer: Wood cabinet with high impact composite end caps
 Frequency response (~ 3 dB): 40 Hz - 100 Hz
 Frequency range (-10 dB): 34 Hz - 112 Hz
 Maximum SPL @ 1 m: 130 dB SPL (peak 6 dB CF)
 Rated power: 1,000 W



AUDERPRO

Professional & Paging Audio System



AP-810LAX, 10 INCH LX-CLASS PREMIUM

AUDERPRO again presents a series of Speaker and Subwoofer products that have high quality and premium, namely the LX-CLASS Active Line Array series. The LX-CLASS Series Active Line Array Speakers have high performance that produces powerful and stunning acoustic performance for all music events for either permanent or portable installation.

Spesification :

Frekuensi Respon (-10 dB) : 50Hz - 18KHz
Sensitivitas 1 W @ 1 M : 105dB
SPL Maksimum : 140 dB
DSP System : 48KHz - 56Bits
Rentang Frekuensi (+3 dB) : 54Hz - 18kHz
Sistem Tipe Speaker : 10 Inch, 2 - Way

AP-855SLAX, 15 Inch LX-CLASS

AUDERPRO again presents a series of Speaker and Subwoofer products that have high quality and premium, namely the LX-CLASS Active Line Array series. The LX-CLASS Series Active Line Array Subwoofer has high performance that produces powerful and stunning acoustic performance for all music events whether for permanent or portable installation.

Spesification :

Frekuensi Respon (-10 dB) : 40Hz - 100Hz
Sensitivitas 1 W @ 1 M : 102 dB
SPL Maksimum : 140 dB
DSP System : 48KHz - 56bits
Rentang Frekuensi (+3 dB) : 44Hz - 100Hz
Sistem Tipe Speaker : 15 Inch Subwoofer Aktif



harman/kardon
by HARMAN



Harman Kardon Onyx Studio 8

Transducers : Woofer 1 x 120mm, Tweeter 2 x 20mm
Rated output power : 50W RMS
Power supply : 100-240Vac, 50Hz/60Hz
Frequency response : 50Hz - 20kHz (-6dB)
Signal-to-noise ratio : > 80 dB



Harman Kardon Onyx Studio 8

Transducers : 3 x 20mm tweeter, 86 x (100 x 50)
Rated output power : 150W RMS
Power Supply : 100-240V-50/60Hz
Signal-to-noise ratio : >80dB
Dimensions : 1150 x 62 x 115mm (45" x 2.4" x 4.5")

SENNHEISER

TeamConnect Ceiling 2



Product properties	
Dimensions (L x B x H)	590 x 590 x 43 mm
Weight	5670 g (12.5 lbs)
Audio Output	1 x 3-pin terminal (115 Ohms) contact MC9V 1.5-3-ST-3.81 2 x Digital Dante Network Audio (RJ-45 Primary and Secondary)
Ethernet / Control	1 x RJ-45 Ethernet Port for PoE power supply and data/control communication
Supply voltage	44 - 57 V DC PoE IEEE 802.3af Class 3
Power consumption	max. 8.8 W
Safety certification	UL E2308 certification (including UL 2043 testing and compliance)

Acoustic properties	
Transducer principle	Pre-polarized condenser microphone
AF frequency response	50 Hz - 18,000 Hz
Sensitivity	0 dBu/1Pa (200 mV/Pa)
Signal-to-noise ratio	83 dB (A)
Latency	6 ms
Equivalent noise level	11 dB (A)
Number of IE 10-232 microphones capsules	28
Pick-up pattern	Beam Pattern
Max. sound pressure level	104 dB SPL
Dynamic range	93 dB (A)



Variant 1
Installed flush in a dropped/coffered ceiling (500 x 500 mm)
Accessories:
SL CM FB US (500 mm to 2 ft) or
SL CM FB 625 (500 mm to 625 mm) angle brackets



Variant 2
Mounted directly below the ceiling
Accessories:
SL CM FB Ceiling mounting frame



Variant 3
Suspended from the ceiling
Accessories:
SL CM SK Ceiling suspension set



TeamConnect Ceiling Medium F

Product properties	
Dimensions (Ø x H)	407 x 45 mm
Weight	max. 4.0 kg (10.0 lbs)
Audio Output	1 x 3-pin terminal (115 Ohms) contact MC9V 1.5-3-ST-3.81 2 x Digital Dante Network Audio (RJ-45)
Ethernet / Control	1 x RJ-45 Ethernet Port for PoE power supply and data/control communication
Supply voltage	PoE: IEEE 802.3af Class 3 or PoE: IEEE 802.3bt / Type 2 / Class 4 (when cascaded)
Power consumption	approx. 9 W
Safety certification	CE/EN E2308-1 Including UL 2043 testing and compliance

Acoustic properties	
Transducer principle	Pre-polarized condenser microphones
AF frequency response	100 Hz - 18,000 Hz
Sensitivity	0 dBu/1Pa (100 mV/Pa)
Signal-to-noise ratio	77 dB (A)
Equivalent noise level	17 dB (A)
Number of microphone capsules	16
Pick-up pattern	Beam Pattern
Max. sound pressure level	98 dB SPL
Dynamic range	87 dB (A)



Surface Mounted
mounted directly below the ceiling
The TCC M-F is used to surface mount or suspend the TeamConnect Ceiling Medium F. It comes with a black or white TeamConnect Ceiling M-F and matching housing.



Suspended
suspended from the ceiling
The TCC M-F Ceiling Mount Kit is for use when installing the TeamConnect Ceiling Medium F in high-ceilinged rooms. It consists of three 16.4 ft (5m) steel cables that can be adjusted to fit the required installation height.



Flush Mounted
installed flush in a dropped/coffered ceiling
The TCC M-F Flush Mount Kit is used to install the TeamConnect Ceiling Medium F to the ceiling. It comes with a TeamConnect Ceiling M-F and Flush mount accessories.



EW-DX SK / SKM-S Base Set (Q1-9)

EW-DX base set consisting of 1 x EW-DX SKM-S (handheld with mute switch), 1 x EW-DX SK (wireless bodypack transmitter), 1 x EW-DX EM 2 rackmount receiver (2 channels) and 2 x BA 70 rechargeable batteries.



EW-DX EM 2 DANTE (Q1-9) Evolution Wireless Digital Rack Receiver



EW-DX SK | EW-DX SK 3-PIN Evolution Wireless Digital Bodypack Transmitter

Model	Frequency	Power	Channels	Channels	Channels
EW-DX SK	5.8 GHz	100 mW	2	2	2
EW-DX SK 3-PIN	5.8 GHz	100 mW	2	2	2
EW-DX SKM-S	5.8 GHz	100 mW	2	2	2
EW-DX SKM-S	5.8 GHz	100 mW	2	2	2
EW-DX SKM-S	5.8 GHz	100 mW	2	2	2
EW-DX SKM-S	5.8 GHz	100 mW	2	2	2
EW-DX SKM-S	5.8 GHz	100 mW	2	2	2
EW-DX SKM-S	5.8 GHz	100 mW	2	2	2
EW-DX SKM-S	5.8 GHz	100 mW	2	2	2
EW-DX SKM-S	5.8 GHz	100 mW	2	2	2



NEXT PRO AUDIO

Passive Line Array



LA212X
3-Way Fully Horn Loaded Line Array



LA122
2-Way Compact Line Array



LA122W
2-Way Compact Wide Line Array



LA26
Ultra-Compact Passive Line Array



LA541BG
Double Bass Reflex Subwoofer



LA541BG 2X4OHM
Double Bass Reflex Subwoofer 2x4ohm



LA518
Reflex Arrayable Subwoofer



LA515
Ultra-Compact Reflex Subwoofer

Active Line Array



LA210X
Active 3-Way Compact Line Array



LA122A
Active 2-Way Compact Line Array



LA122WA
Active 2-Way Compact Wide Line Array



LA551BA
Active Double Bass Reflex Subwoofer



LA541BA
Active Double Bass Reflex Subwoofer




LA518A
Active Reflex Arrayable Subwoofer



LA515A
Active Ultra-Compact Reflex Subwoofer

Passive Speaker



Product Type
Passive High-Performance Full-Range Speaker/Monitor

Nominal Coverage (-6dB)
50°/100° x 50° Rotatable, Tailored Dispersion Technology

Nominal Impedance
8Ω

Low Frequency Driver
1 x 10" (254mm) 2" (51mm) VC, BBC custom speaker

Recommended High-Pass Filter
+20Hz 18dB/oct Butterworth

Frequency Response (-6dB)
33Hz - 18,000Hz


Program Power
800W

Sensitivity (1W, 1m)
100dB (Full Space)

High Frequency Driver
1 x 1.4" (36mm) ext./JF (15mm) VC, BBC custom compression driver

Input Connectors
2 x Neutrik NL4 parallel wired

Active Speaker



Product Type
Active Two-Way Speaker/Monitor

Maximum SPL Pgm/Peak (calculated)
120dB / 120dB (Full Space)

Amplifier Technology
2 channel switched-mode class AB with DSP

DSP Technology
Controlled Networkable DSP 24bit/48kHz

Control Type
Via iOS/iOS and supplied software "SOUNDMA3C"

Power Consumption
120W

Frequency Response (-6dB)
33Hz - 18,000Hz

Low Frequency Driver
1 x 10" (254mm) 2" (51mm) VC, BBC custom speaker

LF Section Power
80W 400W / 200Wpm / 500W / Peak 1000W

DSP Adjustable Parameters
6 EQ, delay, HPF, LPF, Bass Enhancer, Level, Polarity, Mute

Power Input
90V - 240V

Dimensions (WxHxD)
450 x 654 x 440 mm

VICTORY PRO AUDIO

Microphone



DR-666

Dual Wireless Handheld Microphone

PolarPattern/Type

FreqResponse/Sensitivty

Function

Channel

Material

Range

Feature

Cardioid/Dynamic Microphone

40Hz - 15kHz/-105dBm

Stage stage performance level mixer

2Channels Wireless Microphone

Metal, Plastic

Up to 100m line of sigh

Automatic frequency alignment

Lock setting transmitter and receiver



DR-666CB

Microphone Cable

Communication

Function

Type

ModelNumber

Material

PolarPattern

Sensitivity

Usage

Color

SinglePackageSize

SingleGrossWeight

Wired

Noise Cancelling, Light-weight

Dynamic Microphone

DR-666CB

Metal

Cardioid

-75dB±3dB

Handheld Karaoke Mic

Black

23x10x6cm

1.500 kg



DR-666M,C/D

Microphone Gooseneck

Mic DR-666M

Model Number

Communication Mode

Server Working Voltage

Working Current

Power Consumption

Receiver Sensitivity

Audio Output Voltage

Neighborhood Frequency

Noise Rejection

DR-666M

Dual send and receive

DC 12V - 14V 2A

600MA

5W

-105 dBm

1V

>60dB

Mic DR-666C/D

Model Number

Frequency Range

Transmitter Power Supply

Frequency Response

Comperhensive Signal

Comperhensive Distortion

Receiver Sensitivity

Receiver Distortion

Wireless Microphone S/N

Dynamic Range of

Wireless Microphone

Standard Working Hours

DR-666C/D

610Mhz - 670Mhz

2x AA Battery

80Hz-15kHz

>95dB

<0,01%

>80dBm

<0,5% @1kHz

>95dB

>90dB

6 Hours

Security System

Product Lineup



IP Camera



Indoor Fixed-focal Wi-Fi
Pan & Tilt Network Camera



Fixed-focal Wi-Fi Bullet
Network Camera



Entry IR Fixed-focal
Eyeball Network Camera



Entry IR Fixed-focal
Bullet Network Camera

HDCVI Camera



Starlight HDCVI Fixed
IR Bullet Camera



HDCVI POC IR
Eyeball Camera



HDCVI POC IR
Bullet Camera



HDCVI POC IR
Bullet Camera

PTZ Camera



Starlight IR WizMind
Network Dual-PTZ Camera



Starlight IR WizMind
Network Positioning System



Starlight+ IR WizMind
Network PTZ Camera



Starlight PTZ
Network Camera

CCTV Camera



IP Camera



PTZ Camera



Explosion-Proof
Series



Anti-Corrosion
Series



Thermal
Camera Series

Security Alarm



Wired Intrusion
Alarm



Wireless Intrusion
Alarm



Panic Alarm
Button

SPC CCTV Camera



Bazooka
Outdoor



Tornado
Outdoor



Bazooka
Indoor



Tornado
Indoor



PANORAMIC
WIFI CAMERA



WIFI CAMERA





BOSCH

Fire alarm, Voice Evacuation, Camera and access control solution for luxury apartment buildings

Fire Alarm System



Security Video System



ColorHunter Fixed Bullet Network Camera



Universal Block Storage (UBS)
Ensure the safety of data while enhancing the efficiency.



EasyStar Technology
Radically reduce blurring, deliver clear, bright and colorful image.



Ultra 265 Compression Technology
Reduce up to 90% bandwidth and storage space without compromise on image details.

IPC2314LE-ADF28(40)KM-WL

4MP HD ColorHunter Fixed Bullet Network Camera

- High quality image with 4MP, 1/1.8" CMOS sensor and F1.0 large aperture lens
- 4MP (2688*1520) @ 25/20fps; 4MP (2560*1440) @ 25/20fps; 3MP (2304*1296) @ 30/25fps; 2MP (1920*1080) @ 30/25fps;
- Ultra 265, H.265, H.264, MJPEG
- Colorhunter technology ensures 24-hour full-color images
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic
- White Light, up to 30m white light distance
- Supports 128 GB Micro SD card
- IP67 protection
- Support PoE power supply
- 3-Axis



Uniview CCTV Camera Product Lineup



UNV Bullet Camera

- Resolution : 2mp, 4mp, 5mp, 8mp
- Lens : 2.8(4.0)mm, 2.8-12mm, 2.8mm, 4.0mm
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology
- Support 9:16 Corridor Mode
- Smart IR, up to 50m (164ft) IR distance
- Supports 256 G Micro SD card
- IP67 protection
- 3-Axis



UNV Smart Wireless Cube Camera

- Lens : 2.8mm@F2.0
- Day/night functionality
- Smart IR, up to 10 m (32 ft) IR distance
- Built-in Mic/Speaker
- Wi-Fi
- Micro SD, up to 128GB



UNV Dome Network Camera

- Resolution : 2mp, 4mp, 5mp, 8mp
- Lens : 2.8(4.0)mm, 2.8-12mm, 2.8mm, 4.0mm
- Supports 256 G Micro SD card
- IP67 protection



UNV Turret Camera

- Resolution : 2mp, 4mp, 5mp, 8mp
- Lens : 2.8(4.0)mm, 2.8-12mm, 2.8mm, 4.0mm
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology
- Support 9:16 Corridor Mode
- Smart IR, up to 50m (164ft) IR distance
- Supports 256 G Micro SD card
- IP67 protection
- 3-Axis



UNV Analog Camera

- Product Series :
- Dolphin Series
 - Whale Series



UNV PTZ Camera

- Product Series :
- Dolphin Series
 - Whale Series



Lenovo

Find a laptop that's perfect for you

Shop for a laptop by type, filter and compare tech specs, or browse the latest for work, gaming, and school.

Lenovo
ThinkPad



Lenovo
ThinkBook



Lenovo
IDEAPAD



Lenovo
YOGA



Lenovo
LEGION



Lenovo
ThinkCentre



Lenovo
IDEACENTRE



Lenovo
LEGION



DELL

Everyday Laptop

Easily switch from work to play with versatile and secure laptops, designed for both productivity and entertainment.



**Latitude | Inspiron | Dell Education
Dell Chrome Enterprise**

Processor : Intel Celeron, i Series, Ultra Series, AMD
Graphics : Intel Arc, AMD Graphics, NVIDIA Graphics
Operating System : Windows 10 & 11
Available Memory RAM : 4, 8, 16, 32 GB
Storage Size : 128 GB - 1 TB

High-Performance Laptop

Powerful laptops and workstations built for those who demand the highest specs for advanced performance and AI workloads: top-tier graphics and processors, and abundant memory.



**XPS | Latitude | Inspiron | Precision
Latitude Rugged**

Processor : Intel Celeron, i Series, Ultra Series, Snapdragon X
Graphics : Intel Arc, NVIDIA GeForce
Operating System : Windows 10 & 11, Ubuntu
Available Memory RAM : 4, 8, 16, 32 GB
Storage Size : 128 GB - 1 TB

Gaming Laptop

Experience high performance gaming with iconic designs and intelligently engineered laptops.



Alienware | G Series

Processor : Intel i Series, Ultra Series, Amd Ryzen
Graphics : NVIDIA GeForce RTX 3000 - 4000 Series
Operating System : Windows 11 Home & Pro
Available Memory RAM : 8, 16, 32 GB
Storage Size : 512 GB - 1 TB

All-in-One Desktops

Connect seamlessly with all-in-one desktops designed for easy set up and an enhanced video and audio experience.

Product Line : OptiPlex & Inspiron

Screen Size : 24", 27"

Processor : Amd Ryzen 3 - 7 Series, Intel Core i Series (i3, i5, i7)



axioo MyBook Series 

The Axioo MyBook series comes with a thin design and light weight so that it is convenient to carry anywhere.



axioo MyPC Series 

A PC from Axioo that is your mainstay to create various dreams productively, and also achieve unlimited fun with specifications according to your wishes





All-in-One PC

ASUS Zen AiO

Processor : Intel Core i7, AMD Ryzen 7 5000 Series
 VGA Card : NVIDIA GeForce, AMD Radeon
 Up to 16GB Memory
 Up to 23.8" FHD Multi-touch display
 Up to 1 TB HDD + 256GB SSD storage
 Up to 23.8" FHD Multi-touch display



All-in-One PC

ASUS Everyday AiO

Processor : Intel Core i7, AMD Ryzen 7 5000 Series
 VGA Card : NVIDIA GeForce, AMD Radeon
 Up to 16GB Memory
 Up to 1 TB HDD + 256GB SSD storage

ASUS Chromebox 4 Mini PC



- Processor : Intel Core atau Celeron Gen 10
- Dual-port HDMI dan USB-C 3.2 Gen 1 Mendukung 3 layer 4K
- Intel Wifi 6
- Dudukan VESA baru yang dapat dikunci dapat terpasang ke permukaan dengan aman dan menawarkan skenario penggunaan yang lebih luas.

ASUS Laptop



Laptop ExpertBook

Durable, trusted business partner



Laptop Zenbook

Business travel in style



Laptop Vivobook

Versatile and practical for business



Laptop Chromebook

Cloud for business

Zyrex Product Lineup



Zyrex PC Dekstop



- Processor : Intel Core i Series
- RAM Up to 32 GB
- Monitor Zyrex LED
- SSD 512GB
- Input Device Zyrex Keyboard Dan Mouse



Zyrex Laptop



- Processor : Intel Core i Series
- VGA : Intel Iris Xe, Intel UHD Graphics
- RAM Up to 32 GB
- SSD 512GB



Zyrex Mini PC ZN-121

- Intel J3455 Processor
- 4GB DDR4
- 64 Gb
- Mini PC ZN-121
- Input Device Zyrex Keyboard Dan Mouse



Mini PC J3455

- Qualcomm® Snapdragon™ Mobile Compute Platform
- 10nm 64bit Octacore CPU Up To 2.96 GHz
- RAM 8GB + UFS 128GB
- 12.3" Crystal Clear Display
- 2880*1920 IPS Panel (2K)
- LTE/4G (B1,B3,B5,B8,B40), GSM (900/1800), WCDMA (900/2100), WLAN 2.4/5.1/5.8

SPC A1-23 Gen 2



- Screen : 23.8" FHD
- Processor : Intel Core i5
- Memory 4GB Storage 128GB
- VGA : Intel HD Graphics

SPC 238I5



- Screen : 23.8" FHD
- Processor : Intel Core i5
- Memory 8GB Storage 512GB
- VGA : Intel HD Graphics

SPC X1 Gen 10



14" FHD | Intel Core-i3 | Memory 4GB
 Storage 128GB | Intel UHD Graphics

ADVAN

Advan Workpro

Intel Core i5-1035G7
 Graphic : Intel Integrated Graphics
 Memory : 8GB DDR4 SODIMM
 Storage : 256/512GB SSD NVMe



Advan Workplus

AMD Ryzen 5 6600H
 GPU : AMD Integrated graphics
 RAM : 16GB Onboard
 Memory : 512 GB PCIE 3.0 SSD



DAC®

DAC F1 D14 DN59 513 8-256 (LTXKDO)

Intel Core i5 Gen 13
Integrated Intel® Graphics
SODIMM DDR4 8GB
256GB SSD-M.2



DAC 7D ARN776-V8

AMD Ryzen 7 7735HS
GPU Navi 33 (RX7600M 8GB VRAM DDR6)
SODIMM DDR5 16GB
1TB SSD-M.2 NVME



DAC LAPTOP F1 D14 DN50

DAC F1 D14 DN50 C511
i5-1135G7 8GB 256GB
Intel Iris
Windows 11 Pro



ZOAN

ZOAN NOTEBOOK RIVER I142



EXPERIENCE CONNECTIVITY LIKE NEVER BEFORE

- Dual Slot SODIMM DDR4 for seamless multitasking
- High-Speed PCIe4.0×4 SSD for lightning-fast data access
- Impressive battery capacity for extended usage
- Rich interface for versatile connectivity
- Expandable storage options for all your needs
- Physical security lock hole for peace of mind

acer Professional Laptop

Designed for Bussiness

Increase your productivity with a high-performance business laptop that's ready for anything.



TravelMate P6 14

TravelMate P6 is a thin and light business laptop for mobile professionals. Powered by Intel vPro® and Intel® Evo™ Design, it ensures fast performance with low power consumption for longer battery life so you can enjoy seamless and secure hybrid work from anywhere.



TravelMate P4 14 Intel

Designed for hybrid workers in SMBs or Enterprises, the TravelMate P4 business laptop offers fast performance, powerful security features, and a fast-charging battery for a more enjoyable hybrid work experience in the office, at home, or on the go.



TravelMate P4 16

Designed for hybrid workers in SMBs or Enterprises, the TravelMate P4 business laptop offers fast performance, powerful security features, and a fast-charging battery for a more enjoyable hybrid work experience in the office, at home, or on the go.



TravelMate P2 14 Intel

With cost-effective business laptops powered by the latest generation Intel® Core™ processors with vPro, you can safely rely on your best performance while achieving your business sustainability goals.



TravelMate P2 14 AMD

Power your business to success with a cost-effective business laptop powered by the latest AMD Ryzen™ Pro 7000 Series processors. Security and performance you can rely on to achieve your business's sustainable goals.



TravelMate P2 16 Intel

With cost-effective business laptops powered by the latest generation Intel® Core™ processors with vPro, you can safely rely on your best performance while achieving your business sustainability goals.



ENCLOSURE KIOSK

What are you looking for?

scan for information
and order



Kiosk Mesin Antrian

Dikenal sebagai sistem manajemen antrian, adalah solusi yang inovatif untuk mengatur dan mengelola antrian pelanggan atau pengunjung dalam berbagai lingkungan, seperti bank, rumah sakit, pusat layanan, atau kantor pemerintah. Dengan bahan material Plat Besi 2mm, dan Finishing dengan Powder Coating atau Duco.



Anjungan Mandiri / Self Service Kiosk

Solusi inovatif untuk memberikan layanan mandiri kepada pelanggan dalam berbagai lingkungan, mulai dari pusat perbelanjaan hingga bandara, stasiun kereta api, dan banyak lagi. Dirancang untuk meningkatkan efisiensi operasional dan meningkatkan pengalaman pelanggan. Dengan bahan Case Plat Besi 1.2mm dan Finishing Powder Coating.

Kiosk Digital Signage

Menampilkan konten digital yang dinamis dan menarik dalam berbagai lingkungan, mulai dari toko ritel dan restoran hingga pusat perbelanjaan, bandara, stasiun kereta, dan banyak lagi. Dirancang untuk menarik perhatian pengunjung dan meningkatkan pengalaman pelanggan.



Kiosk Table Stand

Kiosk Table Stand adalah sebuah meja atauudukan yang dirancang khusus untuk menampilkan produk atau informasi di dalam sebuah kiosk, baik di dalam ruangan maupun di luar ruangan. Dengan Case yang di desain menyerupai meja berbahan Case Plat Besi 1.2mm Finishing Powder Coating, dan Base Plat Besi 1.5mm Finishing Powder Coating.

Customized Kiosk

Customized Kiosk adalah kiosk yang dirancang dan diproduksi sesuai dengan kebutuhan dan spesifikasi khusus dari pengguna atau bisnis. Customized kiosk menawarkan solusi yang lebih tepat dan efektif untuk memenuhi tujuan spesifik. Berbahan Case Plat Besi 1.2mm Finishing Powder Coating





What is the difference AR and VR?

VR

Replacing

Your Environment
with Digital Content

AR

Enhancing

Your Environment
with Digital Content

Service



WebAR

Creating Web AR
content easily accessible



App Creation

Development App
with XR experience



Virtual Reality

Creating Virtual
Reality experience



Data Visualization

Visualize data using AR



3D Creation

Creating 3D or 2D Assets



Social Media Filter

Interactive and Dynamic
visual effects

LAYANAN SECURITY CYBER



Penetration Testing



**Vulnerability
Assessment**




**Digital Forensic &
Incident Response**



**Threat Hunting &
Compromise Assessment**



**Security
Awareness**

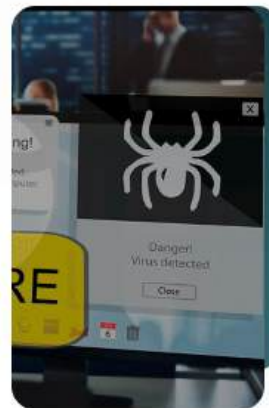

Cyber Drill Test



Security Training



Purple Teaming



System Hardening

INTERNET OF THINGS PRODUCT LINEUP

**We enable seamless integration and connectivity
for IoT devices, fostering innovation and
driving digital transformation**



BANKING & RETAIL AUTOMATION
Payment terminals, ATM, Kiosk



UTILITIES & RENEWABLES
Water, Electricity



TRANSPORTATION & LOGISTICS
Fleet Tracking, Insurance Telematics,
High Value Goods



AGRICULTURE & LIVESTOCK
Animals, Farms, Plantations



scan for information
and order



ciptaprintopratama.co.id

Project management software

Effectively manage people and resources

Product & Service Lineup

1. Project Building

2. Project Extended Team

Access to a larger talent pool, Cost-effective, Scalability, Flexibility, Faster Development Times

3. Project Blueprint

A detailed framework that is used as a basis for making policies in a business or project.

4. Discovery & Co-Creation

Increase brand awareness, Brand loyalty, Reduce the risk of loss.

5. Maintenance Application

Maintaining software so that all functions in it can continue to run properly.

6. Hardware & IoT Integration

Connecting the Digital and Physical Worlds

7. Digital Transformation Consulting

Strategy Consulting, Digital Readiness Assessment, Implementation Support, Research, Capacity Building

8. AI & Data Driven Solutions

Machine Learning, Predictive Analytics, Data Intelligence, Decision Support

scan for information
and order




digitalprnopratiama.co.id

Parking System Product Lineup



Skema Parkir :




System Manless Full System

Sistem Manless atau sering disebut sebagai sistem semi otomatis, sistem ini memakai alat/mesin Ticket Dispenser yang ditempatkan dipintu masuk sebagai alat/mesin untuk mengeluarkan tiket masuk.

System Manless Custom

Sistem Manless Custom ini memakai alat/mesin Ticket Dispenser yang ditempatkan dipintu masuk sebagai alat/mesin untuk mengeluarkan tiket yang berisi barcode pada saat tombol pada alat/mesin tersebut ditekan oleh pengunjung yang menggunakan kendaraan pada saat akan masuk area parkir, sedangkan dipintu keluar tidak memerlukan operator karna di sistem ini memakai Box Scan Barcode Ticket untuk akses keluar dari area parkir.

Skema Parkir :

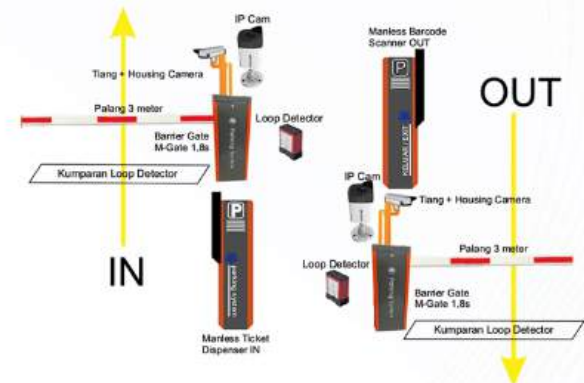

System Parkir Tap & Go

System manless Cashless atau sering disebut dengan Tap & Go, sistem ini merupakan sistem tanpa operator dengan metode pembayarannya menggunakan E-Money, sistem ini memakai alat/mesin Tap Card dalam box dispenser di pintu masuk yang hanya sama halnya dengan masuk kedalam jalan Toll.

Full Manless Parking System (Tanpa Operator)


1. Sistem terintegrasi dengan pembayaran E-Money, OVO, dll.
2. Inovasi baru dalam sistem parkir dengan kamera pembeda kendaraan otomatis dan pencatatan Plat nomor kendaraan.
3. Tanpa memerlukan operator pada pintu masuk dan pintu keluar.



Parking System Product Lineup



Skema Parkir :

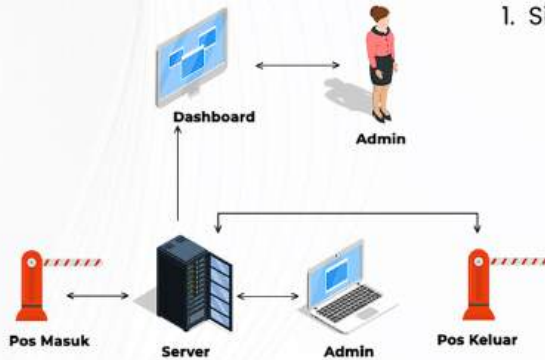


Semi Automatic Terintegrasi

1. Sistem terintegrasi dengan pembayaran E-Money, OVO dan Pembayaran Tunai
2. System Menless Parking pada umumnya
3. Memerlukan operator pada pintu keluar

Semi Automatic Terintegrasi

System Manless Cashless Cardless (MCC), sistem ini merupakan sistem tanpa operator dengan metode pembayarannya menggunakan E-Money & E-Wallet, sistem ini memakai alat/mesin Tap Card & Ticket barcode dalam box dispenser di pintu masuk, menggunakan box payment didalam gedung untuk transaksi dan cetak tiket barcode untuk akses keluar.

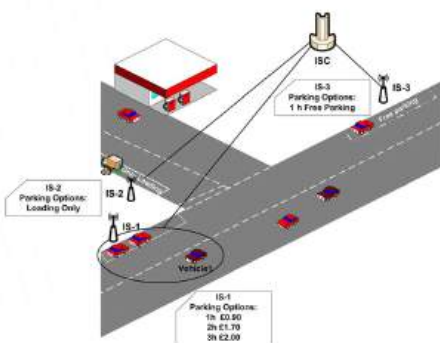

System On Street Parking

Parkir di tepi jalan (On-Street Parking adalah parkir yang mengambil tempat di sepanjang badan jalan dengan atau tanpa melebarkan jalan untuk pembatas parkir. Sistem ini digunakan untuk mengelola tempat parkir yang ada dibadan jalan (On Street).

Fitur Aplikasi E-Parking ini :

- Atur Lokasi
- Atur petugas & shift petugas parkir
- Atur tarif parkir dan metode pembayaran
- Atur hak akses
- Atur absensi (riwayat dan laporan kehadiran)
- Lacak perangkat
- Mencetak & melihat laporan (Aktifitas parkir, audit kendaraan, pendapatan parkir, absensi, dll)
- Data Pajak
- Integrasi Keamanan
- Data uji emisi



Featured Product 2026
PT. CIPTA APRINDO PRATAMA